


RAW TRÄSKRUV C4 – TRÄ

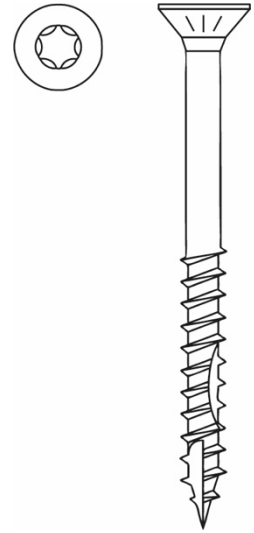

Mått	Artikelnummer	Streckkod	Försänkning	Styck per låda
5,0 x 70 mm	9763044	5710764858117	TX25	900
5,0 x 80 mm	9763045	5710764858124	TX25	800
5,0 x 90 mm	9763046	5710764858131	TX25	600
5,0 x 100 mm	9763047	5710764858148	TX25	500
5,0 x 120 mm	9763048	5710764858032	TX25	300
6,0 x 80 mm	9763049	5710764858155	TX30	700
6,0 x 90 mm	9763051	5710764858179	TX30	400
6,0 x 100 mm	9763050	5710764858162	TX30	350
6,0 x 120 mm	9763052	5710764858186	TX30	300

Material: C1022

Ytbehandling: Zinkpläterad – 5 mikron vaxad

Saltdimsprovning: 1 500 timmar

Böjningsvinkel: Minst 15 grader

Certifieringar/standard: SS-EN14592

Förpackning: Plastlåda med etikett

CE 18	
RAW A/S Skanderborgvej 277, 8260 Viby J. - DK raw-products.info/ce	
DOP_RAW_Decking1_062022 EN14592:2008 Fasteners for use in load bearing timber structures	
Yield moment	
Thread part:	14311 Nmm
Smooth part:	18091 Nmm
Withdrawal parameter	
Across fibres:	10,08 N/mm ²
Along fibres:	8,50 N/mm ²
Head pull-through:	20,21 N/mm ²
Tensile capacity:	14,18 kN
Torsional ratio:	4,92
Durability:	Electro coating ≥25 µ

CE 18	
RAW A/S Skanderborgvej 277, 8260 Viby J. - DK raw-products.info/ce	
DOP_RAW_Decking2_062022 EN14592:2008 Fasteners for use in load bearing timber structures	
Yield moment	
Thread part:	7044 Nmm
Smooth part:	10095 Nmm
Withdrawal parameter	
Across fibres:	8,83 N/mm ²
Along fibres:	6,20 N/mm ²
Head pull-through:	19,2 N/mm ²
Tensile capacity:	863 kN
Torsional ratio:	5,59
Durability:	Electro coating ≥25 µ