

### Area of Application

ESSVE Particleboard screws are intended for the installation of against particle-, panel-, plywood- or flooring grade chipboard indoors against wooden joists.

### Description

The screw is produced by harden carbon steel with bright zinc plated surface treatment. Fitted with Philips crosshead PH2. The head is equipped with 4 cutting grooves

that countersinks the screw, leaving a smooth surface without splinters.

ESSVE Particleboard screw are suitable for the most common auto-feed screwdrivers available on the market.

### Installation


A screwdriver with a depth stop should be used for quick and efficient installation.

Recommended rpm: 30-75 mm 2000-2800/ min.



Material	Hardened steel SAE C1018
Surface treatment	Bright zink plated 5 µm
Corrosion categories	C1

## Particleboard screw for wooden joists, bright zinc plated 5 µm

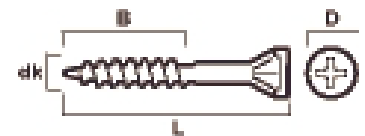

Item no.	Dimension dk x L mm	D mm	B mm	Bit nr	ESSBOX size	Qty/ pack.	Pack/ Large pack.
542630	4,2 x 30	7,4	17,0	PH2	202	250	12
542640	4,2 x 42	7,4	26,0	PH2	203	250	8
542655	4,2 x 55	7,4	32,0	PH2	203	200	8
542130	4,2 x 30	7,4	17,0	PH2	304	1000	4
542142	4,2 x 42	7,4	26,0	PH2	304	1000	4
542155	4,2 x 55	7,4	32,0	PH2	304	500	4
542175	4,2 x 75	7,4	50,0	PH2	203	200	8

### Plastic bucket

Item no.	Dimension dk x L mm	D mm	B mm	Bit no	Qty/ pack.
542243	4,2 x 42	7,4	26,0	PH2	1700
542255	4,2 x 55	7,4	32,0	PH2	1000

### Small package

Item no.	Dimension dk x L mm	D mm	B mm	Bit nr	Qty/ pack	Pack./ Large pack
513164	4,2 x 30	7,4	17,0	PH2	100	6
513166	4,2 x 42	7,4	26,0	PH2	100	6
513168	4,2 x 55	7,4	32,0	PH2	100	6