

### Area of Application

ESSVE Drywall screw is designed for the application of plasterboards indoors against steel joists, drill capacity 0.7 - 2.0 mm.

### Description

The screw is produced by hardened carbon steel with phosphated surface treatment. It is equipped with Philips crosshead Ph2.

### Installation

A screwdriver with a depth stop should be used for quick and efficient installation.

Recommended rpm:  
25-55 mm 2000-2800/min




### Specification

Material	Hardened carbon steel SAE C1018
Surface treatment	Phosphated
Usage	Approx 20 per m <sup>2</sup>
Corrosion categories	C1

### Drywall screw with drillpoint for steel joists, phosphated.

#### ESSBOX

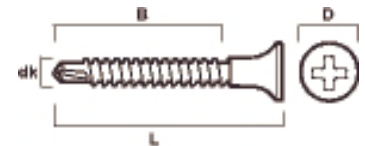

Item. no	Dimension dk × L mm	D mm	B mm	Drill capacity mm	Bit no	ESSBOX size	Qty/pack.	pack./large pack.
581125	3,5 × 25	8,4	20,0	0,7-2,0	PH2	204	1000	6
581141	3,5 × 40	8,4	35,0	0,7-2,0	PH2	304	900	4
581155	3,5 × 55	8,4	50,0	0,7-2,0	PH2	304	500	4