

Area of Application

ESSVE Wood screw HEX with two fibre cuts, hexagonal head intended for most installation work in wood, chipboard, plywood, etc.

Description

The screw is produced in hardened carbon steel with CorrSeal surface treatment for outdoor environments

The screw is fitted with a cutter along the stem and one on the point. This means a very low drive-in torque in harder materials and minimi-

ses splitting.

On screws longer than 130 mm, there is an additional fibre cut directly after the usual wood thread, this is to facilitate installation of longer and thicker screws. The screw conforms to the CE requirement as per EN14592.

Installation

Recommended rpm: 400-1200/min.



CorrSeal

ESSVE CorrSeal surface treatment.




Type approved by SITAC No. 0075/05

Specification

Material	Hardened steel SAE C1022
Surface treatment	CorrSeal
Corrosion category	C4

Wood screw HEX, CorrSeal ESSBOX

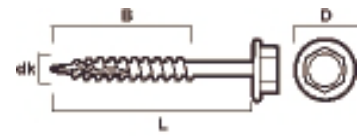

Item no. 9996910



Item no. 9996920



Item no.	Dimension dk x L mm	B mm	D mm	Key width mm	ESSBOX size	Qty/ pack.	Pack./ large pack.
117402	6,5 x 45	24,0	14	10,0	203	100	8
117404	6,5 x 55	30,0	14	10,0	204	100	6
117406	6,5 x 75	45,0	14	10,0	304	100	4
117408	6,5 x 90	60,0	14	10,0	304	100	4
117410	6,5 x 110	60,0	14	10,0	204	50	6
117412	6,5 x 120	60,0	14	10,0	204	50	6
117414	6,5 x 140	60,0	14	10,0	204	50	6

Item no.	Dimension dk x L mm	B mm	D mm	Key width mm	ESSBOX size	Qty/ pack.	Pack./ large pack.
117416	8,0 × 45	24,0	17,5	13,0	203	50	8
117418	8,0 × 55	30,0	17,5	13,0	203	50	8
117420	8,0 × 75	45,0	17,5	13,0	204	50	6
117422	8,0 × 100	60,0	17,5	13,0	304	50	4
117424	8,0 × 130	60,0	17,5	13,0	304	50	4
117426	10,0 × 50	30,0	22	15,0	204	50	6
117428	10,0 × 75	45,0	22	15,0	203	25	8
117430	10,0 × 90	55,0	22	15,0	204	25	6
117432	10,0 × 120	60,0	22	15,0	204	25	6
117434	10,0 × 150	60,0	22	15,0	206	25	4

Accessories

Item no.	Dimension mm	Qty/ pack.
9995666	Magnetic nut socket, 10x45	1
9995667	Magnetic nut socket, 13x45	1
9996910	Square drive 1/2, 75 mm with bit drive	1
9996920	Socket 1/2 15 mm.	1