

Area of Application

ESSVE Particle and base screws with drill-point are intended for the installation of against particle-, panel-, plywood- or flooring grade chipboard indoors against steel joists. Drill capacity 0.7-2.0 mm.

Description

The screw is produced in hardened carbon steel with bright zinc plated surface treatment. Fitted with Philips crosshead Ph2.

The head is equipped with 4 cutting grooves that countersinks the screw, leaving a smooth surface without splinters.

Installation

A screwdriver with a depth stop should be used for quick and efficient installation.


Recommended rpm:
42-55 mm 2000-2800/min



Specification

Material	Hardened steel SAE C1018
Surface treatment	Bright zinc plated 5 µm
Usage	Approx 20 per m ²
Corrosion categories	C1

Particleboard screw with drillpoint, bright zinc plated ESSBOX

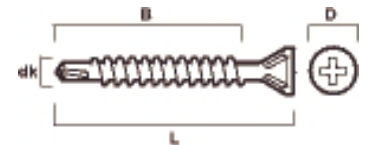

Item no.	Dimension dk × L mm	D mm	B mm	Bits no	ESSBOX size	Qty/ pack.	Pack./ large pack.
556143	3,9 × 42	7,2	38,0	PH2	304	900	4
556155	3,9 × 55	7,2	51,0	PH2	304	500	4