

Area of Application

ESSVE Wafer head screw with sharp point is intended for installing in sheet materials indoors against wood or steel joists, max 0.4-0.9 mm.


ted surface treatment and in different RAL colours. It is equipped with Philips crosshead Ph2.

Description

The screw is manufactured of hardened carbon steel with phosphated or bright zinc plating.

Installation

Recommended rpm:
400-1200/min

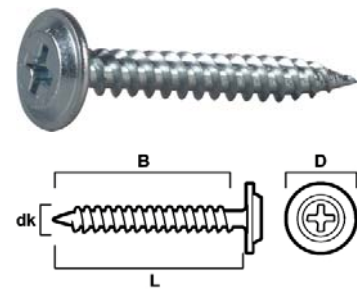

Specification

	Phosphated	Bright zinc plated	Painted	Dacro 500 hr
Material	Hardened steel SAE C1022	Hardened steel SAE C1022	Hardened steel SAE C1022	Hardened steel SAE C1022
Surface treatment	Phosphated	Bright zinc plated 5µm	Painted in different colours	Dacro 500 hr
Corrosion categories	C1	C1	C1	C3

Wafer head screw sharp point, for wood/steel joists, painted ESSBOX

Item no.	Dimension dk × L	D mm	B mm	Bit no	Colour	Colour code	ESSBOX size	Qty/pack.	Pack./large pack.
573613	4.2 × 13	11.0	13.0	PH2	White	RAL9010	202	250	12
575613	4.2 × 13	11.0	13.0	PH2	Black	RAL9011	202	250	12
573619	4.2 × 19	11.0	19.0	PH2	white	RAL9010	202	250	12
573625	4.2 × 25	11.0	25.0	PH2	White	RAL9010	202	250	12
573626	4.2 × 25	11.0	25.0	PH2	Silver	RAL9006	202	250	12
573627	4.2 × 25	11.0	25.0	PH2	Brick red	RAL8004	202	250	12
573628	4.2 × 25	11.0	25.0	PH2	Red	RAL3009	202	250	12
573629	4.2 × 25	11.0	25.0	PH2	Graphite grey	RAL7024	202	250	12
575625	4.2 × 25	11.0	25.0	PH2	Black	RAL9011	202	250	12
573632	4.2 × 32	11.0	32.0	PH2	White	RAL9010	203	250	8
573650	4.2 × 50	11.0	50.0	PH2	White	RAL9010	203	200	8
573652	4.2 × 50	11.0	50.0	PH2	Black	RAL9011	203	200	8

Small package

Item no.	Dimension dk × L mm	D mm	B mm	Bit no	Colour/RAL	Qty/pack.
413330	4,2 × 13	11,0	13,0	PH 2	White/9010	25
513332	4,2 × 25	11,0	25,0	PH 2	White/9010	25
513334	4,2 × 50	11,0	50,0	PH 2	White/9010	12
513350	4,2 × 13	11,0	50,0	PH 2	Black/9011	25
513354	4,2 × 25	11,0	50,0	PH 2	Black/9011	25

