

### Area of Application

ESSVE Drywall screw is designed for the application of plasterboards indoors against light steel joists, drill capacity 0.4 - 0.9 mm.

### Description

The screw is produced by hardened carbon steel with phosphated or bright zinc plated sur-

face. It is equipped with Philips crosshead Ph2.

### Installation

A screwdriver with a depth stop should be used for quick and efficient assembly.


Recommended rpm:  
25-50 mm 2800-6000/min.



### Specification

	Phosphated	Bright zinc plated
Material	Hardened Carbon steel SAE C1018	Hardened Carbon steel SAE C1018
Surface finish	Phosphated	Bright zinc plated 5 µm
Screw use	Approx 20 per m <sup>2</sup>	Approx 20 per m <sup>2</sup>
Corrosion class	C1	C1

## Drywall screw for steel joists, phosphated ESSBOX

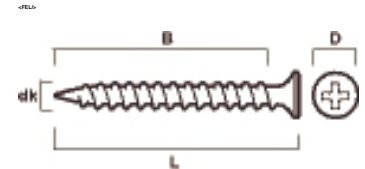

Item no	Dimension dk x L mm	D mm	W mm	Bits no	ESSBOX size	Qty/pack.	Pack./large pack.
521125	3.5 x 25	8.4	20.0	PH2	204	1000	6
521142	3.5 x 41	8.4	36.0	PH2	304	900	4
521150	3.5 x 50	8.4	45.0	PH2	304	500	4

### Plastic bucket

Item no.	Dimension dk x L mm	D mm	B mm	Bit no	Qty/pack.	Pack./large pack.
521242	3.5 x 41	8.4	36.0	PH2	1800	1