

### Area of Application

ESSVE Hard drywall screw is intended for the installation of hard and robust drywall boards indoors against wooden joists.

### Description

The screw is produced in hardened carbon steel with bright zinc plated surface treatment. It is equipped with Philips crosshead Ph2. The screw has a reverse thread under the head which presses the sheet material tightly

against the joist.

### Installation


A screwdriver with a depth stop should be used for quick and efficient installation. Recommended rpm: 35-45 mm 2000-2800/min.



### Specification

Material	Hardened steel SAE C1018
Surface treatment	Bright zinc plated 5 µm
Usage	Approx 20 per m <sup>2</sup>
Corrosion category	C1

## Hard drywall screw for wooden joists, bright zinc plated ESSBOX

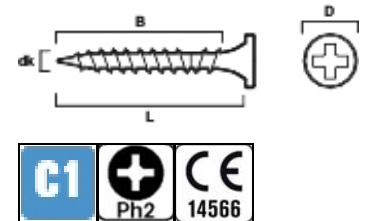

Item no.	Dimension dk x L mm	D mm	B mm	Bit no	ESSBOX size	Qty/ pack.	Pack./ large pack.
<b>533137</b>	3.9 x 35	7.8	28.0	PH2	304	1000	4
<b>533148</b>	3.9 x 45	7.8	38.0	PH2	304	900	4