

PRODUKTIDENTIFIKATION

Tabell 1 – Balkskor, utvändiga flökar

ESSVE Artikelnummer	b [mm]	h [mm]	b+2h [mm]	t [mm]	Produkt ID
451001	36	142	320	2.0	320-90 U
451008	45	88	220	1.5	220-65 U PL
451011	45	88	220	1.5	220-65 U PL
451014	45	123	290	1.5	290-65 U PL
451017	45	123	290	1.5	290-65 U PL
451020	45	168	380	1.5	380-65 U PL
451023	45	168	380	1.5	380-65 U PL
451025	45	197	440	2.0	440-130 U
451038	48	121	290	1.5	290-65 U PL
451041	48	121	290	1.5	290-65 U PL
451044	48	166	380	1.5	380-65 U PL
451047	48	166	380	1.5	380-65 U PL
451050	48	86	220	1.5	220-65 U PL
451053	48	86	220	1.5	220-65 U PL
451059	51	84	220	1.5	220-65 U PL
451068	51	119	290	1.5	290-65 U PL
451069	51	119	290	1.5	290-65 U PL
451071	51	164	380	1.5	380-65 U PL
451074	51	164	380	1.5	380-65 U PL
451076	51	195	440	2.0	440-130 U
451079	51	94	240	2.0	240-65 U
451083	51	84	220	1.5	220-65 U PL
451085	60	100	260	2.0	260-65 U
451088	60	160	380	2.0	380-90 U
451091	60	190	440	2.0	440-130 U
451106	73	124	320	2.0	320-90 U
451109	73	153	380	2.0	380-90 U
451112	76	122	320	2.0	320-90 U
451115	76	152	380	2.0	380-90 U
451118	76	182	440	2.0	440-130 U
451130	90	145	380	2.0	380-90 U
451133	90	230	550	2.0	550-155 U
451136	98	141	380	2.0	380-90 U
451139	100	140	380	2.0	380-120 U
451145	100	200	500	2.0	500-155 U
451148	115	162	440	2.0	440-130 U
451151	120	160	440	2.0	440-130 U
451154	140	180	500	2.0	500-155 U

PRODUKTIDENTIFIKATION

Tabell 2 – Balkskor, invändiga flikar

ESSVE Artikelnummer	b [mm]	h [mm]	b+2h [mm]	t [mm]	Produkt ID
451157	45	137	320	2.0	320-90 I
451160	45	137	320	2.0	320-90 I
451163	45	97	240	2.0	240-65 I
451166	45	97	240	2.0	240-65 I
451169	48	136	320	2.0	320-90 I
451172	48	136	320	2.0	320-90 I
451175	48	166	380	2.0	380-90 I
451178	48	166	380	2.0	380-90 I
451181	48	96	240	2.0	240-65 I
451184	48	96	240	2.0	240-65 I
451193	51	135	320	2.0	320-90 I
451196	51	135	320	2.0	320-90 I
451199	51	94	240	2.0	240-65 I
451202	51	94	240	2.0	240-65 I
451217	90	145	380	2.0	380-90 I
451223	100	170	440	2.0	440-130 I
451226	115	162	440	2.0	440-130 I

Prestandadeklaration, DoP 703.2/2013

(Version 3)

För att se tidigare versioner, klicka på relevant länk: http://www.itwcp-techdocs.eu/DoP/Archive/DOP703.2_V2/DOP_703.2_Swedish_V2.pdf

1. Produkttyp: Paslode balkskor
2. Identifikation: Typ 220-65 U PL, 290-65 U PL, 380-65 U PL, 230-65 U-I, 240-65 U-I, 250-65 U-I, 260-65 U-I, 320-90 U-I, 380-90 U-I, 380-120 U-I, 440-130 U-I, 500-155 U-I och 550-155 U-I
3. Avsedd användning: För olika slags bärande konstruktioner
4. Namn, registrerat företagsnamn eller registrerat varumärke och tillverkarens kontaktadress enligt krav i artikel 11(5):
SIMA Industri ApS
Industrivej Nord 40
DK-7490 Aulum
5. Auktoriserad representant: N/A
6. Bedömningsystem: 2+
7. Anmält organ / Test institut:

Dancert A/S
no. 1073
Gregersensvej 4
DK-2630 Taastrup

utförd enligt system 2+
8. För balkskor har ett Europeisk Teknisk Bedömningsdokument utfärdats:
DS Certificering A/S, ETA-Danmark, Kollegievej 6, DK-2920 Charlottenlund utfärdat ETA-08/0007 och utfärdat 2015-08-11.
9. Deklarerad egenskap:

Fotnoter till tabellen:

Karakteristiska värden är beräknade och deklarerade i enlighet med ETA-08/0007.
10. Prestanda för produkten överensstämmer med deklarerade egenskaper i punkt 9.

Denna prestandadeklaration är utfärdad på eget ansvar av den tillverkare som anges under punkt 4.

Undertecknad för tillverkaren av:



Flemming Sørensen
QHSE / R&D Manager

Middelfart, 2018-09-14

PrestandadeklARATION, DoP 703.2/2013

Artikel	Tjocklek [mm]	Bredd [mm]	Korrosions- skydd	Klimat- klass	Material	Stålstandard	Lastriktning	Deklarerade värden enligt ETA 08/0007								
								Karakteristiska värden								
								Värden har endast blivit modifierade med k_{mod} inte γ_M								
								Lastvaraktighet k_{mod}	Spik [kN]	Spik [kN]	Spik / Bult [kN]	Spik / Bult [kN]				
Balkskor																
220-65 U PL 45x88 48x86 51x84	1,5	65	Z275MA	1-2	S250GD	EN 10346	Nedåtriktad f_{down}	Spik / bult	8	14	2 / 2	4 / 2				
								P - last	5,11	7,58	5,29	7,93				
								L - last	5,96	8,84	6,17	9,25				
								M - last	6,81	10,10	7,05	10,57				
								S - last	7,66	11,37	7,93	11,89				
								I - last	9,36	13,89	9,69	14,53				
								Karakteristisk	8,51	12,63	8,81	13,21				
							Uppåtriktad f_{up}	P - last	2,64	5,20	2,64	5,29				
								L - last	3,08	6,07	3,08	6,17				
								M - last	3,52	6,94	3,52	7,05				
								S - last	3,96	7,80	3,96	7,93				
								I - last	4,84	9,54	4,84	9,69				
								Karakteristisk	4,40	8,67	4,40	8,81				
								290-65 U PL 45x123 48x121 51x119	1,5	65	S250GD	1-2	S250GD	EN 10346	Nedåtriktad f_{down}	Spik / bult
P - last	7,93	11,89	7,93	11,89												
L - last	9,25	13,87	9,25	13,87												
M - last	10,57	15,86	10,57	15,86												
S - last	11,89	17,84	11,89	17,84												
I - last	14,53	21,80	14,53	21,80												
Karakteristisk	13,21	19,82	13,21	19,82												
Uppåtriktad f_{up}	P - last	5,29	6,15	5,29	6,15											
	L - last	6,17	7,18	6,17	7,18											
	M - last	7,05	8,20	7,05	8,20											
	S - last	7,93	9,23	7,93	9,23											
	I - last	9,69	11,28	9,69	11,28											
	Karakteristisk	8,81	10,25	8,81	10,25											
	380-65 U PL 45x168 48x166 51x164	1,5	65	Z275MA	1-2	S250GD	EN 10346								Nedåtriktad f_{down}	Spik / bult
P - last								10,57	17,17	10,57	17,17					
L - last								12,33	20,03	12,33	20,03					
M - last								14,09	22,90	14,09	22,90					
S - last								15,85	25,76	15,85	25,76					
I - last								19,37	31,48	19,37	31,48					
Karakteristisk								17,61	28,62	17,61	28,62					
Uppåtriktad f_{up}								P - last	7,93	10,76	7,93	10,76				
								L - last	9,25	12,56	9,25	12,56				
								M - last	10,57	14,35	10,57	14,35				
								S - last	11,89	16,15	11,89	16,15				
								I - last	14,53	19,73	14,53	19,73				
								Karakteristisk	13,21	17,94	13,21	17,94				
								230-65 U-I 240-65 U-I	2	65	Z275MA	1-2	S250GD	EN 10346	Nedåtriktad f_{down}	Spik / bult
P - last	6,79	9,85	10,27	10,27												
L - last	7,92	11,49	11,98	11,98												
M - last	9,05	13,13	13,69	13,69												
S - last	10,18	14,77	15,40	15,40												
I - last	12,44	18,05	18,82	18,82												
Karakteristisk	11,31	16,41	17,11	17,11												
Uppåtriktad f_{up}	P - last	2,77	1,38	2,77	4,52											
	L - last	3,23	1,61	3,23	5,28											
	M - last	3,69	1,84	3,69	6,03											
	S - last	4,15	2,07	4,15	6,79											
	I - last	5,07	2,53	5,07	8,29											
	Karakteristisk	4,61	2,3	4,61	7,54											

Prestandadeklaration, DoP 703.2/2013

Artikel	Tjocklek [mm]	Bredd [mm]	Korrosions- skydd	Klimat- klass	Material	Stålstandard	Lastriktning	Deklarerade värden enligt ETA 08/0007				
								Karakteristiska värden				
								Värden har endast blivit modifierade med k_{mod} inte γ_M				
								Lastvaraktighet k_{mod}	Spik [kN]	Spik [kN]	Spik / Bult [kN]	Spik / Bult [kN]
230-65 U-I RF 45x93x1,5 240-65 U-I RF 45x97x1,5 48x96x1,5 51x94x1,5	1,5	65	-	1-2-3	AISI 316	EN 10088	Nedåtriktad f_{down}	Spik / bult	10	18	4 / 2	6 / 2
								P - last	1,58	2,37	1,58	2,37
								L - last	1,74	2,61	1,74	2,61
								M - last	2,05	3,08	2,05	3,08
								S - last	2,21	3,32	2,21	3,32
								I - last	2,84	4,27	2,84	4,27
								Karakteristisk	4,27	6,4	4,27	6,4
							Uppåtriktad f_{up}	P - last	1,58	2,37	1,58	2,37
								L - last	1,74	2,61	1,74	2,61
								M - last	2,05	3,08	2,05	3,08
								S - last	2,21	3,32	2,21	3,32
								I - last	2,84	4,27	2,84	4,27
								Karakteristisk	4,27	6,4	4,27	6,4
								250-65 U-I	2	65	Z275MA	1-2
P - last	9,05	9,05	9,85	13,20								
L - last	10,56	10,56	11,49	15,40								
M - last	12,06	12,06	13,13	17,60								
S - last	13,57	13,57	14,77	19,80								
I - last	16,59	16,59	18,05	24,20								
Karakteristisk	15,08	15,08	16,41	22,00								
Uppåtriktad f_{up}	P - last	2,77	4,15	2,77	4,15							
	L - last	3,23	4,84	3,23	4,84							
	M - last	3,69	5,53	3,69	5,53							
	S - last	4,15	6,22	4,15	6,22							
	I - last	5,07	7,60	5,07	7,60							
	Karakteristisk	4,61	6,91	4,61	6,91							
	260-65 U-I	2	65	Z275MA	1-2	S250GD	EN 10346					
P - last								9,05	9,05	9,85	14,37	
L - last								10,56	10,56	11,49	16,77	
M - last								12,06	12,06	13,13	19,16	
S - last								13,57	13,57	14,77	21,56	
I - last								16,59	16,59	18,05	26,35	
Karakteristisk								15,08	15,08	16,41	23,95	
Uppåtriktad f_{up}								P - last	2,77	4,15	2,77	4,15
								L - last	3,23	4,84	3,23	4,84
								M - last	3,69	5,53	3,69	5,53
								S - last	4,15	6,22	4,15	6,22
								I - last	5,07	7,60	5,07	7,60
								Karakteristisk	4,61	6,91	4,61	6,91
								320-90 U-I	2	90	Z275MA	1-2
P - last	11,31	11,31	9,94	11,74								
L - last	13,20	13,20	11,59	13,69								
M - last	15,08	15,08	13,25	15,65								
S - last	16,97	16,97	14,90	17,60								
I - last	20,74	20,74	18,22	21,52								
Karakteristisk	18,85	18,85	16,56	19,56								
Uppåtriktad f_{up}	P - last	2,77	5,52	2,77	5,52							
	L - last	3,23	6,44	3,23	6,44							
	M - last	3,69	7,36	3,69	7,36							
	S - last	4,15	8,28	4,15	8,28							
	I - last	5,07	10,12	5,07	10,12							
	Karakteristisk	4,61	9,2	4,61	9,2							

Prestandadeklaration, DoP 703.2/2013

								Deklarerade värden enligt ETA 08/0007				
Artikel	Tjocklek [mm]	Bredd [mm]	Korrosions- skydd	Klimat- klass	Material	Stålstandard	Lastriktning	Karakteristiska värden				
								Värden har endast blivit modifierade med k_{mod} inte γ_M				
								Lastvaraktighet k_{mod}	Spik [kN]	Spik [kN]	Spik / Bult [kN]	Spik / Bult [kN]
380-90 U-I	2	90	Z275MA	1-2	S250GD	EN 10346	Nedåtriktad f_{down}	Spik / bult	20	36	8 / 2	12 / 4
								P - last	12,11	13,57	12,11	18,89
								L - last	14,13	15,83	14,13	22,04
								M - last	16,14	18,10	16,14	25,19
								S - last	18,16	20,36	18,16	28,34
								I - last	22,20	24,88	22,20	34,64
								Karakteristisk	20,18	22,62	20,18	31,49
							Uppåtriktad f_{up}	P - last	4,15	6,91	4,15	6,91
								L - last	4,84	8,06	4,84	8,06
								M - last	5,53	9,21	5,53	9,21
								S - last	6,22	10,36	6,22	10,36
								I - last	7,60	12,66	7,60	12,66
								Karakteristisk	6,91	11,51	6,91	11,51
								380-120 U-I	2	120	Z275MA	1-2
P - last	12,11	13,57	12,11	18,89								
L - last	14,13	15,83	14,13	22,04								
M - last	16,14	18,10	16,14	25,19								
S - last	18,16	20,36	18,16	28,34								
I - last	22,20	24,88	22,20	34,64								
Karakteristisk	20,18	22,62	20,18	31,49								
Uppåtriktad f_{up}	P - last	4,15	6,91	4,15	6,91							
	L - last	4,84	8,06	4,84	8,06							
	M - last	5,53	9,21	5,53	9,21							
	S - last	6,22	10,36	6,22	10,36							
	I - last	7,60	12,66	7,60	12,66							
	Karakteristisk	6,91	11,51	6,91	11,51							
	440-130 U-I	2	130	Z275MA	1-2	S250GD	EN 10346					
P - last								14,37	15,83	14,37	21,16	
L - last								16,77	18,47	16,77	24,68	
M - last								19,16	21,11	19,16	28,21	
S - last								21,56	23,75	21,56	31,73	
I - last								26,35	29,03	26,35	38,79	
Karakteristisk								23,95	26,39	23,95	35,26	
Uppåtriktad f_{up}								P - last	4,15	8,29	4,15	8,29
								L - last	4,84	9,67	4,84	9,67
								M - last	5,53	11,05	5,53	11,05
								S - last	6,22	12,43	6,22	12,43
								I - last	7,60	15,19	7,60	15,19
								Karakteristisk	6,91	13,81	6,91	13,81
								500-155 U-I	2	155	Z275MA	1-2
P - last	14,37	18,10	14,37	23,42								
L - last	16,77	21,11	16,77	27,32								
M - last	19,16	24,13	19,16	31,22								
S - last	21,56	27,14	21,56	35,13								
I - last	26,35	33,18	26,35	42,93								
Karakteristisk	23,95	30,16	23,95	39,03								
Uppåtriktad f_{up}	P - last	5,53	9,67	5,53	9,67							
	L - last	6,45	11,28	6,45	11,28							
	M - last	7,37	12,90	7,37	12,90							
	S - last	8,29	14,51	8,29	14,51							
	I - last	10,13	17,73	10,13	17,73							
	Karakteristisk	9,21	16,12	9,21	16,12							

Prestandadeklaration, DoP 703.2/2013

								Deklarerade värden enligt ETA 08/0007				
Artikel	Tjocklek [mm]	Bredd [mm]	Korrosions- skydd	Klimat- klass	Material	Stålstandard	Lastriktning	Karakteristiska värden				
								Värden har endast blivit modifierade med k_{mod} inte γ_M				
								Lastvaraktighet k_{mod}	Spik [kN]	Spik [kN]	Spik / Bult [kN]	Spik / Bult [kN]
550-155 U-I	2	155	Z275MA	1-2	S250GD	EN 10346	Nedåtriktad f_{down}	Spik / bult	28	52	10 / 6	18 / 6
								P - last	16,63	20,36	16,63	25,68
								L - last	19,40	23,75	19,40	29,96
								M - last	22,18	27,14	22,18	34,24
								S - last	24,95	30,54	24,95	38,52
								I - last	30,49	37,32	30,49	47,08
								Karakteristisk	27,72	33,93	27,72	42,80
							Uppåtriktad f_{up}	P - last	6,91	12,43	6,91	12,43
								L - last	8,06	14,50	8,06	14,50
								M - last	9,21	16,58	9,21	16,58
								S - last	10,36	18,65	10,36	18,65
								I - last	12,66	22,79	12,66	22,79
								Karakteristisk	11,51	20,72	11,51	20,72



ETA-Danmark A/S
Göteborg Plads 1
DK-2150 Nordhavn
Tel. +45 72 24 59 00
Fax +45 72 24 59 04
Internet www.etadanmark.dk

Authorised and notified according
to Article 29 of the Regulation (EU)
No 305/2011 of the European
Parliament and of the Council of 9
March 2011

MEMBER OF EOTA



European Technical Assessment ETA-08/0007 of 2015-08-11

I General Part

Technical Assessment Body issuing the ETA and designated according to Article 29 of the Regulation (EU) No 305/2011: ETA-Danmark A/S

Trade name of the construction product:

SIMA Beam Shoe type 220-65 U PL, 290-65 U PL, 380-65 U PL, 230-65 U/I, 240-65 U/I, 250-65 U/I, 260-65 U/I, 320-90 U/I, 380-90 U/I, 380-120 U/I, 440-130 U/I, 500-155 U/I and 550-155 U/I

Product family to which the above construction product belongs:

Three-dimensional nailing plate (Joist hanger for wood to wood connections and wood to concrete or steel connections)

Manufacturer:

Sima Industri ApS
Industrivej Nord 40
DK-7490 Aulum
Tel. +45 97 47 26 11
Fax +45 97 47 37 11
Internet www.simaindustri.dk

Manufacturing plant:

Sima Industri ApS
Industrivej Nord 40
DK-7490 Aulum

This European Technical Assessment contains:

37 pages including 3 annexes which form an integral part of the document

This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of:

Guideline for European Technical Approval (ETAG) No. 015 Three Dimensional Nailing Plates, April 2013, used as European Assessment Document (EAD).

This version replaces:

The previous ETA with the same number issued on 2012-01-23 and expiry on 2017-01-23

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full (excepted the confidential Annex(es) referred to above). However, partial reproduction may be made, with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT

1 Technical description of product and intended use

Technical description of the product

Sima Industri Beam Shoe type 220-65 U PL, 290-65 U PL, 380-65 U PL, 230-65 U/I, 240-65 U/I, 250-65 U/I, 260-65 U/I, 320-90 U/I, 380-90 U/I, 380-120 U/I, 440-130 U/I, 500-155 U/I and 550-155 U/I are one-piece, non-welded joist hangers. They are face mounted timber-to-timber joist hangers connected to the header beam, the steel member or the concrete structure and the joist with a range of nails or bolts.

The joist hangers are made from pre-galvanized steel Grade S250GD + min. Z275 according to EN10346. Dimensions, hole positions, steel type and typical installations are shown in Annex B.

All joist hangers can also be produced from stainless steel number 1.4401, 1.4404, 1.4521, 1.4301 or 1.4509 according to EN 10088-2 or a stainless steel with a minimum characteristic 0.2% yield stress of 240 MPa, a minimum 1.0% yield stress of 270 MPa and a minimum ultimate tensile strength of 530 MPa.

2 Specification of the intended use in accordance with the applicable EAD

The joist hangers are intended for use in making end-grain to side-grain connections in load bearing timber structures, and as a connection between a wood based joist and a solid timber or wood based header, where requirements for mechanical resistance and stability and safety in use in the sense of the Basic Works Requirements 1 and 4 of Regulation (EU) 305/2011 shall be fulfilled.

The joist hangers can be installed as connections between wood based members such as:


- Structural solid timber classified to C14-C40 according to EN 338 / EN 14081,
- Glulam classified to GL24-GL36 according to EN 1194 / EN 14080,
- LVL according to EN 14374,
- Parallam PSL,
- Intrallam LSL,
- Duo- and Triobalken,
- Layered wood plates,
- Kreuzbalken with minimum thickness of 80 mm
- I-beams with backer blocks on both sides of the web in the header and web stiffeners in the joist

- Plywood according to EN 636

However, the calculation methods are only allowed for a characteristic wood density of up to 350 kg/m³. Even though the wood based material may have a larger density, this must not be used in the formulas for the load-carrying capacities of the fasteners.

Annex C gives the tables for the characteristic load-carrying capacities of the joist hanger connections. The design of the connections shall be in accordance with Eurocode 5 or a similar national Timber Code.

It is assumed that the forces acting on the joist hanger connection are the following F_{up} and F_{down} as shown in the figure below. The forces F_{up} and F_{down} shall act in the middle of the joist hanger. It is assumed that the forces are acting right at the end of the joist.

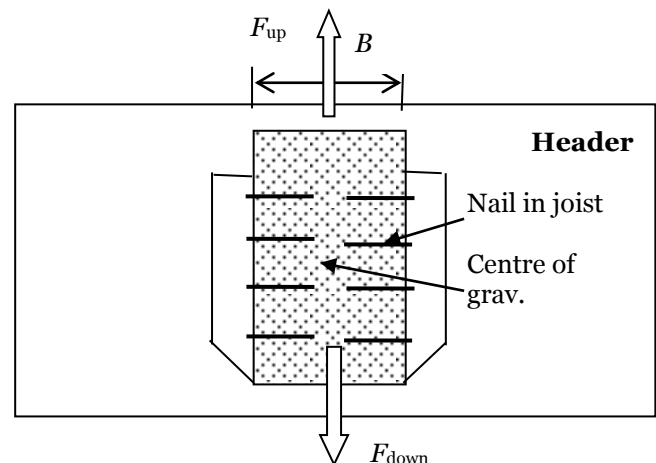

It is assumed that the header is prevented from rotating. Similar it is assumed that the concrete structure or the steel member to which the joist hanger is bolted does not rotate. The joist hangers are intended for use for connections subject to static or quasi static loading.

The zinc-coated hangers are for use in timber structures subject to dry, internal conditions defined by the service classes 1 and 2 of EN 1995-1-1 (Eurocode 5).

The stainless steel hangers are intended for use in service class 1, 2 and 3 according to EN 1995 (Eurocode 5).

The scope of the brackets regarding resistance to corrosion shall be defined according to national provisions that apply at the installation site considering environmental conditions.

The provisions made in this European Technical Assessment are based on an assumed intended working life of the connectors of 50 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

Characteristic	Assessment of characteristic
3.1 Mechanical resistance and stability*) (BWR1)	
Characteristic load-carrying capacity	See Annex C
Stiffness	No performance determined
Ductility in cyclic testing	No performance determined
3.2 Safety in case of fire (BWR2)	
Reaction to fire	The hangers are made from steel classified as Euroclass A1 in accordance with EN 1350-1 and EC decision 96/603/EC, amended by EC Decision 2000/605/EC
3.3 Hygiene, health and the environment (BWR3)	
Influence on air quality	The product does not contain/release dangerous substances specified in TR 034, dated March 2012 0**)
3.7 Sustainable use of natural resources (BWR7)	
	No Performance Determined
3.8 General aspects related to the performance of the product	
	The hangers have been assessed as having satisfactory durability and serviceability when used in timber structures using the timber species described in Eurocode 5 and subject to the conditions defined by service class 1, 2 and 3
Identification	See Annex B

*) See additional information in section 3.8 – 3.9.

**) In addition to the specific clauses relating to dangerous substances contained in this European technical Assessment, there may be other requirements applicable to the products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the Construction Products Regulation, these requirements need also to be complied with, when and where they apply.

3.9 Methods of verification

The characteristic load-carrying capacities have been calculated without considering different ratios between the partial factors for timber connections and steel cross sections. Therefore, in the end use calculation based on this ETA, this shall be considered.

The values in annex C have been determined by multiplying the calculated resistance of the connection by k_{mod} to consider load duration and service classes in accordance with EC 5.

Additionally, the capacities indicated for the upward force F_{up} takes into account the national partial safety factor γ_M .

3.10 Mechanical resistance and stability

See annex C for characteristic load-carrying capacity in the directions F_{down} and F_{up} .

The characteristic capacities of the joist hangers are determined by calculation as described in the EOTA Guideline 015 clause 5.1.2. They should be used for designs in accordance with Eurocode 5 or a similar national Timber Code.

The design models allow the use of fasteners described in the table on page 15 in Annex B.

Connector nails in accordance to ETA-09/0273

The load bearing capacities of the joist hangers has been determined based on the use of Paslode connector nails 4,0 x 40 mm in accordance with ETA-09/0273 for nails. The fastener can be replaced by fastener mentioned in the ETA-09/0273 with the same or higher performance. The capacity of the connection may not be higher than the load mentioned in this ETA.

The capacities of the nails used in calculations are:

$$F_{ax,Rk} = 0,998kN$$

$$F_{V,Rk} = 1,885kN$$

The joist hangers are mounted using either full or half nailing.

No performance has been determined in relation to ductility of a joint under cyclic testing. The contribution to the performance of structures in seismic zones, therefore, has not been assessed.

No performance has been determined in relation to the joint's stiffness properties - to be used for the analysis of the serviceability limit state.

Further, the joist hangers can be fastened to a concrete structure or steel member by bolts with a diameter of, 10 mm in holes with a diameter up to 2 mm larger than the bolt.

3.11 Aspects related to the performance of the product

3.11.1 Corrosion protection in service class 1 and 2.

In accordance with ETAG 015 the joist hanger have a zinc coating weight of min. Z275. The steel employed is S250GD with min. Z275 according to EN 10346.

3.11.2 Corrosion protection in service class 3

In accordance with ETAG 015 stainless steel number 1.4401, 1.4404, 1.4521, 1.4301 or 1.4509 according to EN 10088-2 or a stainless steel with a minimum characteristic 0.2% yield stress of 240 MPa, a minimum 1.0% yield stress of 270 MPa and a minimum ultimate tensile strength of 530 MPa fulfill the requirements.

3.12 General aspects related to the fitness for use of the product

SIMA Industri Beam Shoe are manufactured in accordance with the provisions of this European Technical Assessment using the manufacturing processes as identified in the inspection of the plant by the notified inspection body and laid down in the technical documentation.

Joist hanger connections

A joist hanger connection is deemed fit for use provided:

Header – support conditions

- The header shall be restrained against rotation and be free from wane under the joist hanger.

Wood to wood connections

- Joist hangers can be fastened to wood-based members by nails.
- There shall be nails in all holes or a partial nailing pattern as prescribed in Annex B can be used.
- The characteristic capacity of the joist hanger connection is calculated according to the manufacturer's technical documentation, dated 2006-12-18.
- The joist hanger connection is designed in accordance with Eurocode 5 or an appropriate national code.

- The gap between the end of the joist and the surface, where contact stresses can occur during loading shall be limited. This means that for joist hangers with outward flaps shall the gap between the surface of the end of the joist and that of the header be maximum 3 mm.
- The width of the joist shall be at least the penetration length of the nails, for full nailing and partial nailing without staggering the nails in the joist. For partial nailing with staggered nails in the joist the width shall be at least the penetration length of the nails.
- The cross section of the joist at the joist hanger connection shall have sharp edges at the lower side against the bottom plate, i.e. it shall be without wane.
- The cross section of the header shall have a plane surface against the whole joist hanger.
- The width B_J of the joist shall correspond to that of the joist hanger. B_J shall not be smaller than $B-3$ mm, where B is the inner width of the joist hanger.
- The depth of the joist shall be so large that the top of the joist is at least 20 mm above the upper nail in the joist.
- Nails to be used shall have a diameter, which fits the holes of the joist hangers. Round nails shall have a diameter which is not smaller than the diameter of the hole minus 1 mm.

Wood to concrete or steel

The above mentioned rules for wood to wood connections are applicable also for the connection between the joist and the joist hanger.

- The joist hanger shall be in close contact with the concrete or steel over the whole face. There shall be no intermediate layers in between.
- The gap between the end of the joist and the surface, where contact stresses can occur during loading shall be limited. This means that the gap between the surface of the end of the joist and that of the concrete or steel shall be maximum 3 mm.
- The bolt shall have a diameter not less than the hole diameter minus 2 mm.
- The bolts shall be placed symmetrically about the vertical symmetry line. There shall always be bolts in the 2 upper holes.
- The upper bolts shall have washers 30x30x3,0 mm.

4 Attestation and verification of constancy of performance (AVCP)

4.1 AVCP system

According to the decision 97/638/EC of the European Commission¹, as amended, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) is 2+.

5 Technical details necessary for the implementation of the AVCP system, as foreseen in the applicable EAD

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at ETA-Danmark

Issued in Copenhagen on 2015-08-11 by



Thomas Bruun
Managing Director, ETA-Danmark

Annex A**Changes from last ETA**

Additions and modifications for this ETA	
Pages	Update
9	Annex A added
6, 26-31	Revision of values due to new Paslode Connector nails
3	Addition of stainless beam shoes
13	235-65 U/I edited to 230/65 U/I
11, 26, 32	220-65 U PL added
11, 26, 32	290-65 U PL added
12, 27, 33	380-65 U PL added

Additions and modifications for the ETA valid from 2012-01-23 to 2017-01-23	
Pages	Update
	ETA extended 5 years
13	Beam shoe 235-65 U-I added
32-37	Values for forces upwards added

Annex B

Product details and definitions

Fastener specification

Fastener type	Fastener dimension (mm)		Finish	ETA
	Diameter	Length		
Paslode Connector nail	4,0	40	Electroplated zinc	09/0273
Bolt M8	8		For relevant joist hangers see the assumed characteristic capacities of the bolt connection and compare with the specification of the manufacturer	
Bolt M10	10			
Spit TAPCON	8	70/5	Mechanical galvanized	11/0073

Joist hanger specification:

Holes marked blue are used in case of partial nailing

Holes marked green and blue are used in case of full nailing

Holes marked yellow are used for bolts

Holes marked red are never used

220-65 U PL

Nail holes marked with **blue** are used in case of partial nailing
 Nail holes marked with **blue** and **green** are used in case of full nailing
 Nail holes marked with **yellow** are used when bolting

Art. no.	Art. no. 10 pcs.	B	H
212900	212909	45	88
212903	212912	48	86
212906	212915	51	84

Date:	22-11-2014	<p>Sima a strong connection</p> <p><small>SIMA Industri ApS Industrivej Nord 40 DK-7400 Århus Tel: +45 97 42 20 11 FAX: +45 97 42 37 11 mail@simaindustri.dk www.simaindustri.dk</small></p>	Tolerances: ISO-2768m
Scale:	1:2		Weight: 190 g
Sign:	KHD		Material: S250GD Z275MA
Format:	A4		Art No.:
Copyright THIS DRAWING IS PROPERTY OF SIMA INDUSTRI APS AND MUST NOT BE ACCESSIBLE FOR REPRESENTATIVES FROM OTHER COMPANIES		Type: 220-65 U PL	


290-65 U PL

Nail holes marked with **blue** are used in case of partial nailing
 Nail holes marked with **blue** and **green** are used in case of full nailing
 Nail holes marked with **yellow** are used when bolting

Art. no.	Art. no. 10 pcs.	B	H
212901	212910	45	123
212904	212913	48	121
212907	212916	51	119

Date:	20-11-2014	<p>Sima a strong connection</p> <p><small>SIMA Industri ApS Industrivej Nord 40 DK-7400 Århus Tel: +45 97 42 20 11 FAX: +45 97 42 37 11 mail@simaindustri.dk www.simaindustri.dk</small></p>	Tolerances: ISO-2768m
Scale:	1:2		Weight: 244 g
Sign:	KHD		Material: S250GD Z275MA
Format:	A4		Art No.:
Copyright THIS DRAWING IS PROPERTY OF SIMA INDUSTRI APS AND MUST NOT BE ACCESSIBLE FOR REPRESENTATIVES FROM OTHER COMPANIES		Type: 290-65 U PL	

380-65 U PL

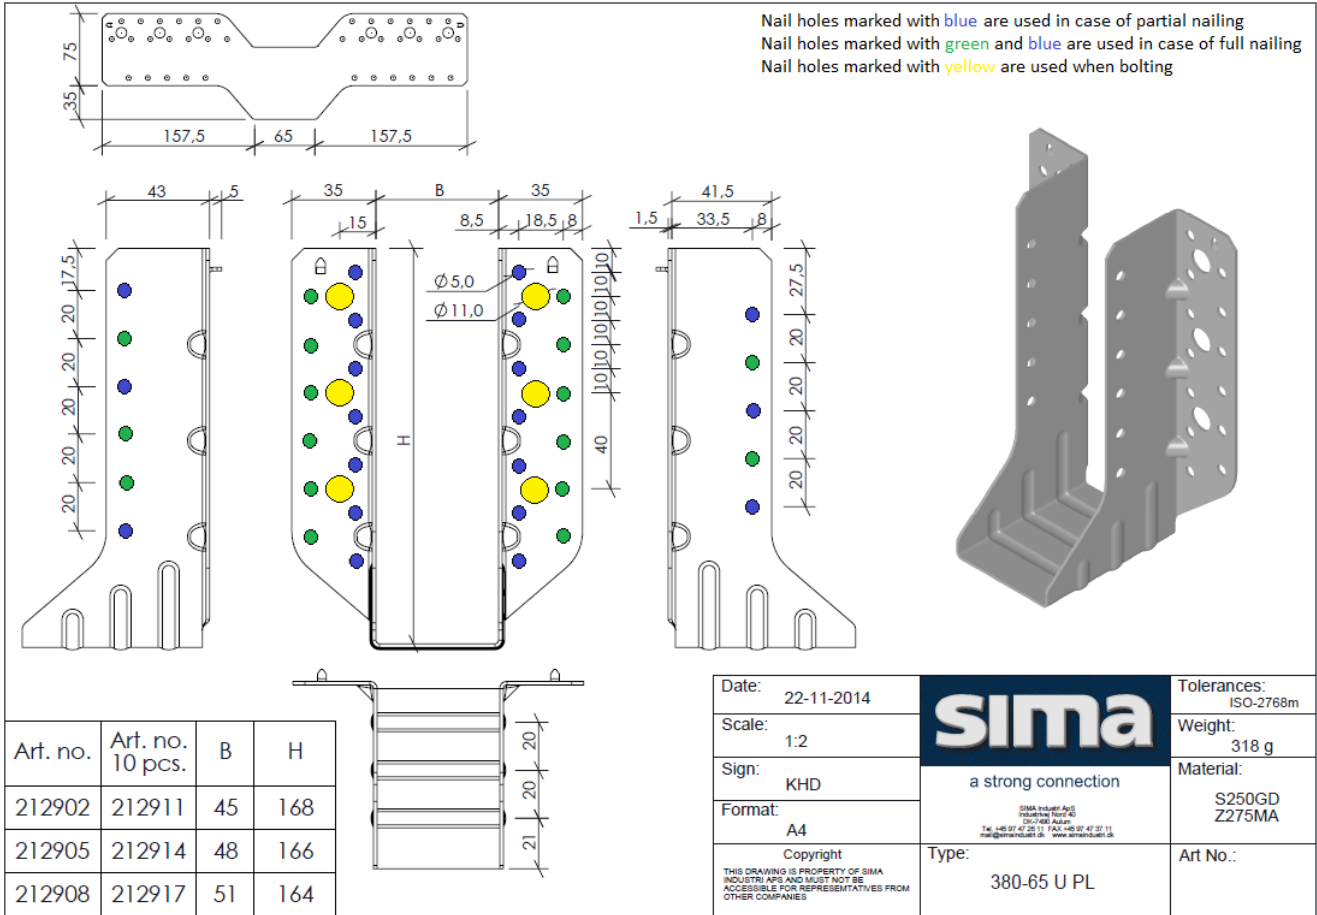

230-65 U/I

Technical drawing of nail plate 230-65 U/I. The drawing includes front, side, and detail views. Dimensions are provided for various parts: 37, B, 37, 17, 10.5, 18.5, 8, 2, 42, 32, 8, 75, 75, 35, 75, 82.5, 65, 82.5, $B + H \times 2 = 230$, 20, $B/2$, $B/2$.

Nail holes marked with blue are used in case of partial nailing
 Nail holes marked with green and blue are used in case of full nailing
 Nail holes marked with yellow are used when bolting
 Nail holes marked with red are never used

Date:	06-07-2013	SIMA		Customer:	
Scale:	1:2	SIMA Industri ApS Industrivej Nord 40 DK-7450 Aulum Tel. +45 97 47 26 11 Fax +45 97 47 37 11 Mail@simaindustri.dk www.simaindustri.dk		T.No:	
Sign.:	KHD	Copyright		Material:	
Format:	A4	THIS DRAWING IS THE PROPERTY OF SIMA INDUSTRI AP/S AND MUST NOT BE ACCESSIBLE FOR REPRESENTATIVES FROM OTHER COMPANIES		S 250GD Z275 MA EN 10346	
Art. no. 10 pcs.		ART. NO.	B	H	Art Nr.:
212417		212317	45	93	230-65 U

Technical drawing of nail plate 230-65 I. The drawing includes front, side, and detail views. Dimensions are provided for various parts: B, 42, 2, 8.5, 8.5, 2, 20, 17.5, 20, H, 75, 60, 35, 82.5, 65, 82.5, $B + H \times 2 = 240$, 20, $B/2$, $B/2$.

Nail holes marked with red are never used
 Nail holes marked with blue are used

Date:	17-03-2014	SIMA		Customer:
Scale:	1:2	SIMA Industri ApS Industrivej Nord 40 DK-7450 Aulum Tel. +45 97 47 26 11 Fax +45 97 47 37 11 Mail@simaindustri.dk www.simaindustri.dk		T.No:
Sign.:	KHD	Copyright		Material:
Format:	A4	THIS DRAWING IS THE PROPERTY OF SIMA INDUSTRI AP/S AND MUST NOT BE ACCESSIBLE FOR REPRESENTATIVES FROM OTHER COMPANIES		S 250GD Z275 MA EN 10326 : 2004
ART. NO.		B	H	Art Nr.:
212375		45	93	230-65 I

240-65 U/I

Technical drawing of SIMA 240-65 U/I profile. Dimensions include: 37, B, 37, 17, 10.5, 18.5, 8, 2, 42, 32, 8, 75, 75, 35, 75, 87.5, 65, 87.5, $B + Hx2 = 240$, 17, 7, 10, 17.5, 17, 7, 10, 17.5, 75, 20, $B/2$, $B/2$, $\phi 9$, $\phi 5$, $\phi 7$.

Nail holes marked with blue are used in case of partial nailing
 Nail holes marked with green and blue are used in case of full nailing
 Nail holes marked with yellow are used when bolting
 Nail holes marked with red are never used

Rev. No.	Date	Correction	Sign.
	06-02-2006		

ART. NO.	B	H
212316	40	100
212318	45	97
212325	48	96
212333	51	94

Date:	06-02-2006	SIMA	Customer:
Scale:	1:2		T.No:
Sign.:	MG	SIMA Industri ApS Industrivej Road 40 DK-7450 Aulum Tel. +45 97 47 20 11 Fax +45 97 47 37 11 Mail@simaindustri.dk www.simaindustri.dk	Material:
Format:	A4		S 250GD Z275 MA EN 10326 : 2004
Copyright		Type:	Art Nr.:
THIS DOCUMENT IS THE PROPERTY OF SIMA. REPRODUCTION AND DISTRIBUTION IS PROHIBITED WITHOUT THE WRITTEN PERMISSION OF SIMA. SIMA IS NOT RESPONSIBLE FOR INFORMATION FROM OTHER COMPANIES.		240-65 U	

Technical drawing of SIMA 240-65 I profile. Dimensions include: B, 2, 8.5, 8.5, 2, 20, 20, 27.5, H, 42, 32, 8, 75, 75, 60, 35, 87.5, 65, 87.5, $B + Hx2 = 240$, 20, $B/2$, $B/2$, $\phi 5$, $\phi 7$.

Nail holes marked with red are never used
 Nail holes marked with blue are used in case of partial nailing

Rev. No.	Date	Correction	Sign.
	12-04-2006		

ART. NO.	B	H
212376	45	97
212378	48	96
212382	51	94

Date:	12-04-2006	SIMA	Customer:
Scale:	1:2		T.No:
Sign.:	MG	SIMA Industri ApS Industrivej Road 40 DK-7450 Aulum Tel. +45 97 47 20 11 Fax +45 97 47 37 11 Mail@simaindustri.dk www.simaindustri.dk	Material:
Format:	A4		S 250GD Z275 MA EN 10326 : 2004
Copyright		Type:	Art Nr.:
THIS DOCUMENT IS THE PROPERTY OF SIMA. REPRODUCTION AND DISTRIBUTION IS PROHIBITED WITHOUT THE WRITTEN PERMISSION OF SIMA. SIMA IS NOT RESPONSIBLE FOR INFORMATION FROM OTHER COMPANIES.		240-65 I	

250-65 U/I

Technical drawing of nail plate 250-65 U/I. The drawing includes front, side, and top views. Dimensions include a total width of 75, a central width of 32, and a height of 75. Hole patterns are shown with diameters of 9, 5, and 7. A note specifies: Nail holes marked with blue are used in case of partial nailing; Nail holes marked with green and blue are used in case of full nailing; Nail holes marked with yellow are used when bolting; Nail holes marked with red are never used.

Rev. No.	Date	Correction	Sign.
	06-02-2006		

ART. NO.	B	H
212320	45	105
212332	50	100

Date:	06-02-2006	Sima	Customer:
Scale:	1:2		T.No.:
Sign.:	MG	SIMA Industri ApS Industrivej Nord 40 DK-7400 Aarslev Tel. +45 97 47 20 11 Fax +45 97 47 37 11 Info@simaindustri.dk www.simaindustri.dk	Material:
Format:	A4		S 250GD Z275 MA EN 10326 : 2004
Copyright	THIS DRAWING IS THE PROPERTY OF SIMA. REPRODUCTION AND ANY OTHER USE WITHOUT THE WRITTEN PERMISSION OF SIMA IS PROHIBITED.	Type:	Art Nr.:
		250-65 U	

Technical drawing of nail plate 250-65 I. The drawing includes front, side, and top views. Dimensions include a total width of 75, a central width of 32, and a height of 60. Hole patterns are shown with diameters of 5 and 7. A note specifies: Nail holes marked with red are never used; Nail holes marked with blue are used in case of partial nailing.

Rev. No.	Date	Correction	Sign.
	12-04-2006		

ART. NO.	B	H
212381	50	100

Date:	12-04-2006	Sima	Customer:
Scale:	1:2		T.No.:
Sign.:	MG	SIMA Industri ApS Industrivej Nord 40 DK-7400 Aarslev Tel. +45 97 47 20 11 Fax +45 97 47 37 11 Info@simaindustri.dk www.simaindustri.dk	Material:
Format:	A4		S 250GD Z275 MA EN 10326 : 2004
Copyright	THIS DRAWING IS THE PROPERTY OF SIMA. REPRODUCTION AND ANY OTHER USE WITHOUT THE WRITTEN PERMISSION OF SIMA IS PROHIBITED.	Type:	Art Nr.:
		250-65 I	

260-65 U/I

Technical drawing of product 260-65 U/I. The drawing includes front, side, and top views. Dimensions are provided for width (B), height (H), and specific hole positions. Hole diameters are indicated as $\phi 9$, $\phi 5$, and $\phi 7$. A 3D perspective view shows the product's profile.

Nail holes marked with **blue** are used in case of partial nailing
 Nail holes marked with **green** and **blue** are used in case of full nailing
 Nail holes marked with **yellow** are used when bolting
 Nail holes marked with **red** are never used

ART. NO.	B	H
212336	51	105
212341	60	100
212346	63	100
212347	64	98

Rev. No.	Date	Correction	Sign.
	06-02-2006		

		Customer:
		T.No:
SIMA Industri ApS Industrivej Rand 40 DK-7450 Aakhus Tel. +45 97 47 20 11 Fax +45 97 47 37 11 Info@simaindustrial.dk www.simaindustrial.dk		Material:
Copyright THIS DRAWING IS THE PROPERTY OF SIMA RECEIVERS AND MUST NOT BE ACCESSED FOR REPRODUCTION FROM OTHER COMPANIES		S 250GD Z275 MA EN 10326 : 2004
Type: 260-65 U		Art Nr.:

Technical drawing of product 260-65 I. The drawing includes front, side, and top views. Dimensions are provided for width (B), height (H), and specific hole positions. Hole diameters are indicated as $\phi 5$ and $\phi 7$. A 3D perspective view shows the product's profile.

Nail holes marked with **red** are never used
 Nail holes marked with **blue** are used in case of partial nailing

ART. NO.	B	H
212383	51	105
212385	60	100
212387	64	98

Rev. No.	Date	Correction	Sign.
	12-04-2006		

		Customer:
		T.No:
SIMA Industri ApS Industrivej Rand 40 DK-7450 Aakhus Tel. +45 97 47 20 11 Fax +45 97 47 37 11 Info@simaindustrial.dk www.simaindustrial.dk		Material:
Copyright THIS DRAWING IS THE PROPERTY OF SIMA RECEIVERS AND MUST NOT BE ACCESSED FOR REPRODUCTION FROM OTHER COMPANIES		S 250GD Z275 MA EN 10326 : 2004
Type: 260-65 I		Art Nr.:

320-90 U/I

Technical drawing of the 320-90 U/I profile. It includes front, side, and end views. Dimensions include a total width of 320 (B + Hx2), a height of 75, and various hole diameters (φ11, φ5, φ7). The front view shows a pattern of blue, green, and yellow holes. The side view shows a 42mm wide top flange and a 75mm wide base. The end view shows a 20mm wide base and a 7mm diameter hole.

Nail holes marked with blue are used in case of partial nailing
 Nail holes marked with green and blue are used in case of full nailing
 Nail holes marked with yellow are used when bolting
 Nail holes marked with red are never used

ART. NO.	B	H
212313	36	142
212321	45	137
212327	48	136
212338	51	135
212349	64	128
212351	73	124
212354	76	122
212357	80	120

Rev. No.	Date	Correction	Sign.
Date:	06-02-2006		
Scale:	1:2		
Sign.:	MG		
Format:	A4		
Copyright	THIS DRAWING IS THE PROPERTY OF SIMA. REPRODUCTION AND DISTRIBUTION IS PROHIBITED WITHOUT THE WRITTEN PERMISSION OF SIMA.		
Type:	320-90 U		



Technical drawing of the 320-90 I profile. It includes front, side, and end views. Dimensions include a total width of 320 (B + Hx2), a height of 75, and various hole diameters (φ5, φ7). The front view shows a pattern of blue holes. The side view shows a 42mm wide top flange and a 75mm wide base. The end view shows a 20mm wide base and a 7mm diameter hole.

Nail holes marked with red are never used
 Nail holes marked with blue are used in case of partial nailing

ART. NO.	B	H
212377	45	137
212379	48	136
212388	76	122

Rev. No.	Date	Correction	Sign.
Date:	12-04-2006		
Scale:	1:2		
Sign.:	MG		
Format:	A4		
Copyright	THIS DRAWING IS THE PROPERTY OF SIMA. REPRODUCTION AND DISTRIBUTION IS PROHIBITED WITHOUT THE WRITTEN PERMISSION OF SIMA.		
Type:	320-90 I		

380-90 U/I

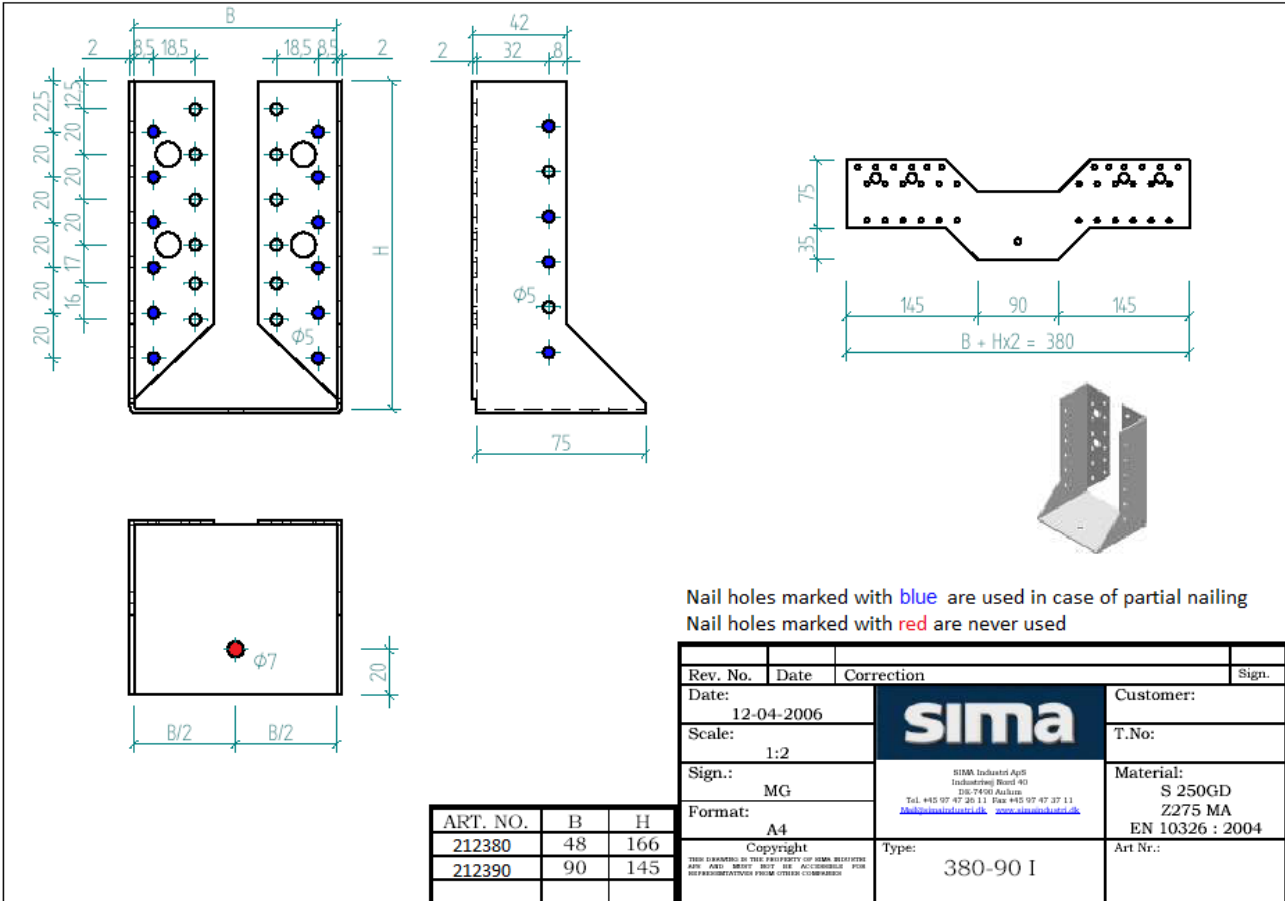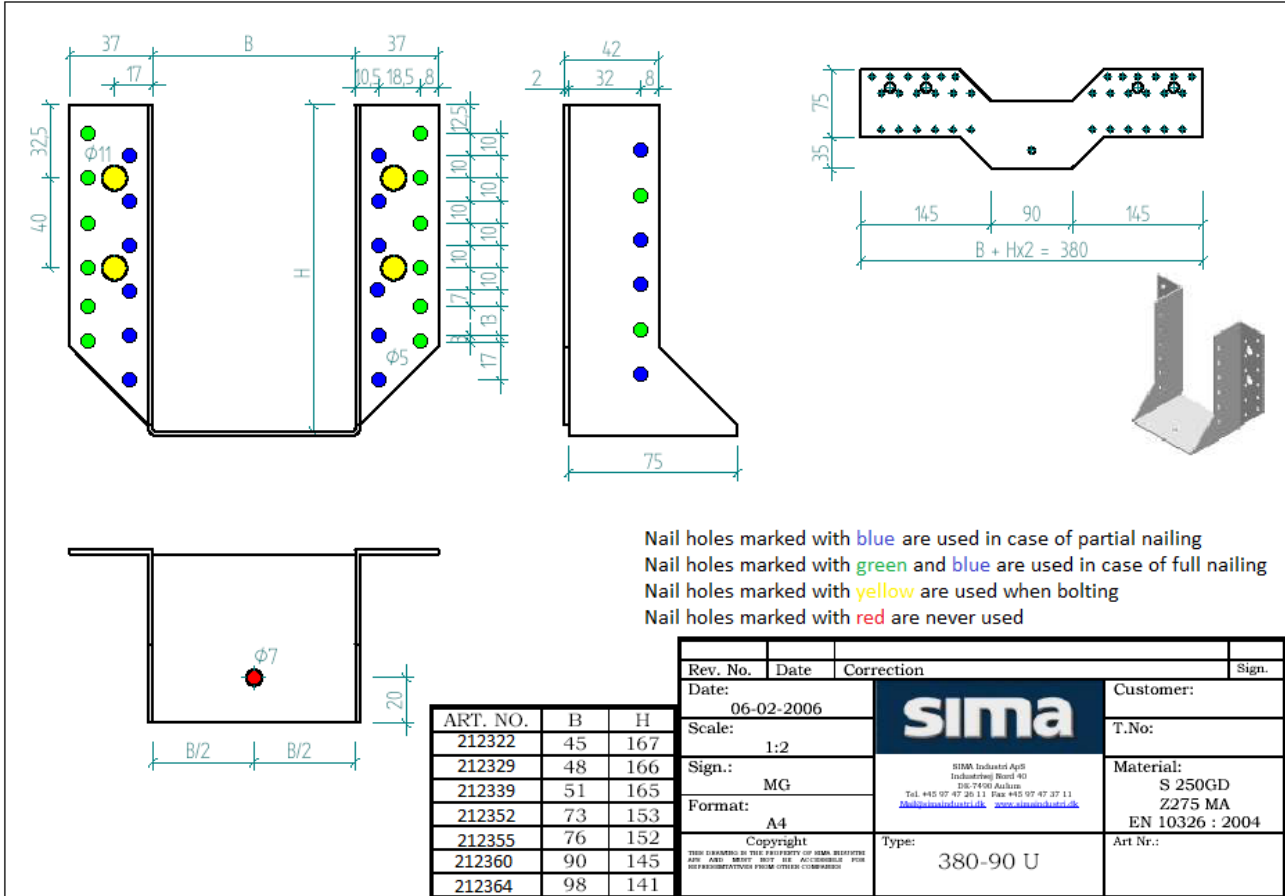

380-120 U/I

Technical drawing of the 380-120 U/I profile. It includes front, side, and top views. Dimensions include a total width of 380 mm (B + Hx2), a height of 75 mm, and a base width of 75 mm. Hole patterns are shown with diameters of 11 mm, 7 mm, and 5 mm. A table below the drawing lists the article number (212366), width (100 mm), and height (140 mm).

ART. NO.	B	H
212366	100	140

Nail holes marked with **blue** are used in case of partial nailing
 Nail holes marked with **green and blue** are used in case of full nailing
 Nail holes marked with **yellow** are used when bolting
 Nail holes marked with **red** are never used

Rev. No.	Date	Correction	Sign.

Date: 07-02-2006	simma	Customer:
Scale: 1:2		T.No:
Sign.: MG	SIMA Industri ApS Industrivej Road 40 DK-7450 Aakhus Tel. +45 97 47 20 11 Fax +45 97 47 37 11 sk@simaindustrial.dk www.simaindustrial.dk	Material: S 250GD Z275 MA EN 10326 : 2004
Format: A4		Type: 380-120 U
Copyright		

Technical drawing of the 380-120 I profile. It includes front, side, and top views. Dimensions include a total width of 380 mm (B + Hx2), a height of 75 mm, and a base width of 75 mm. Hole patterns are shown with diameters of 7 mm and 5 mm. A table below the drawing lists the article number (212366), width (100 mm), and height (140 mm).



ART. NO.	B	H
212366	100	140

Nail holes marked with **red** are never used
 Nail holes marked with **blue** are used in case of partial nailing



Rev. No.	Date	Correction	Sign.

Date: 12-04-2006	simma	Customer:
Scale: 1:2		T.No:
Sign.: MG	SIMA Industri ApS Industrivej Road 40 DK-7450 Aakhus Tel. +45 97 47 20 11 Fax +45 97 47 37 11 sk@simaindustrial.dk www.simaindustrial.dk	Material: S 250GD Z275 MA EN 10326 : 2004
Format: A4		Type: 380-120 I
Copyright		



440-130 U/I

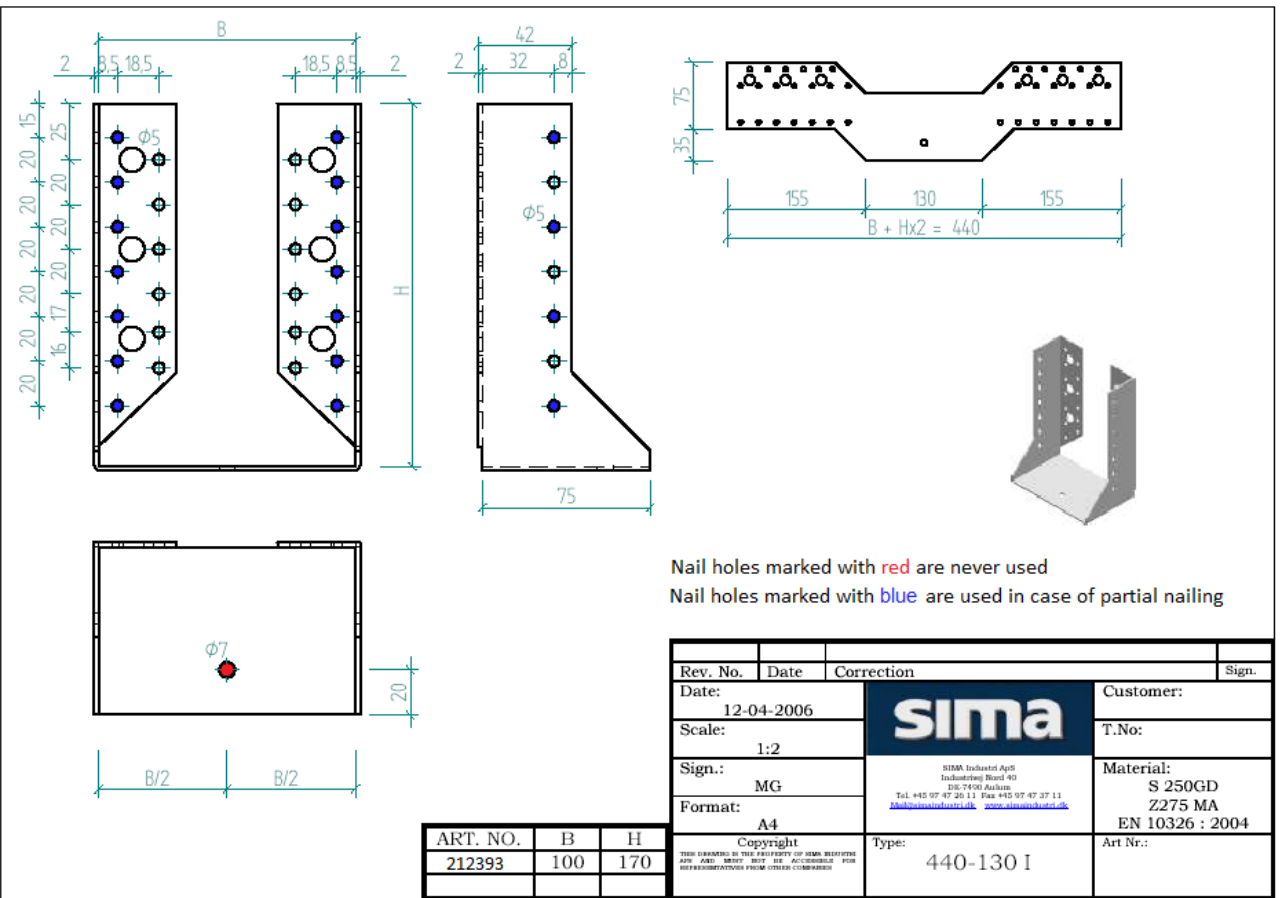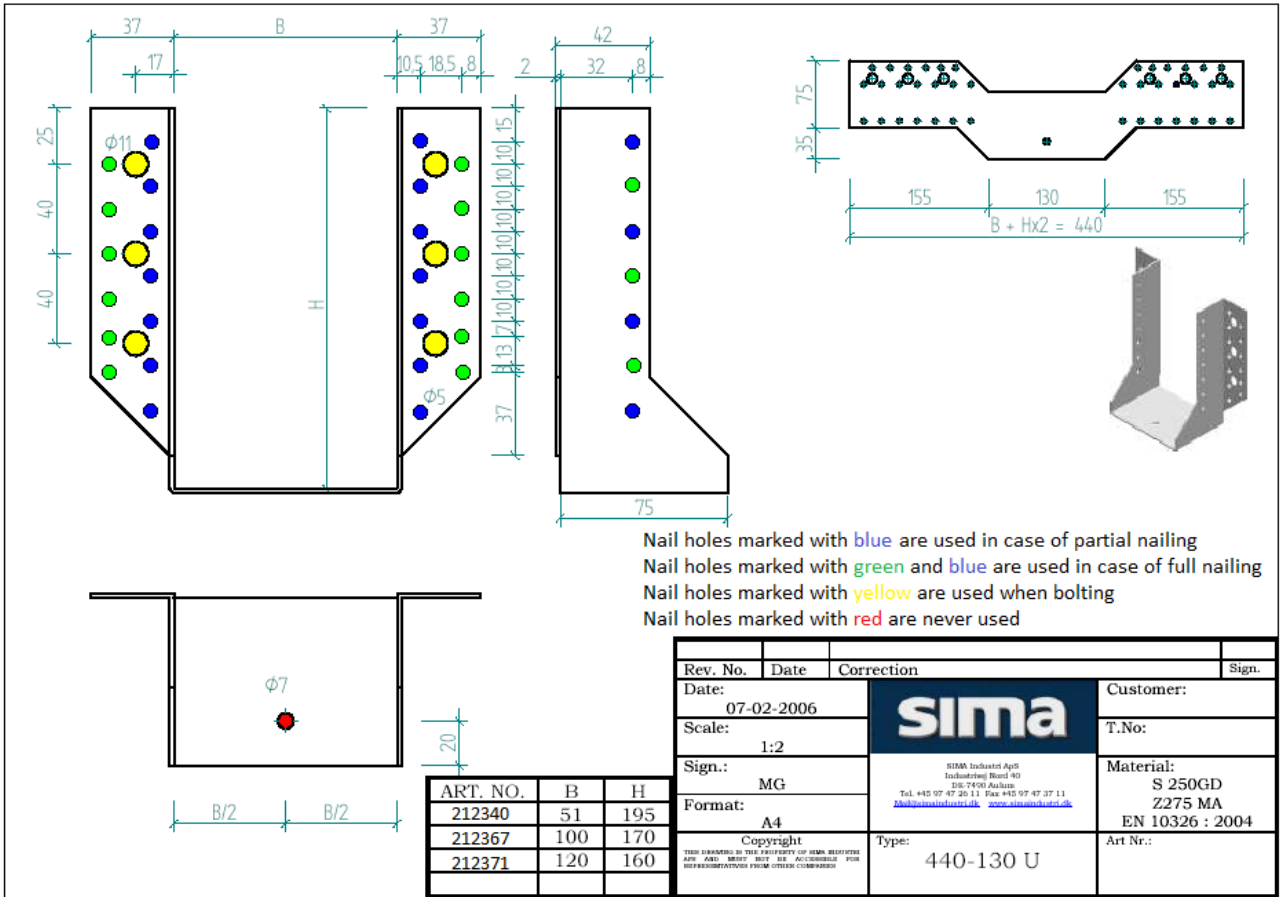

500-155 U/I

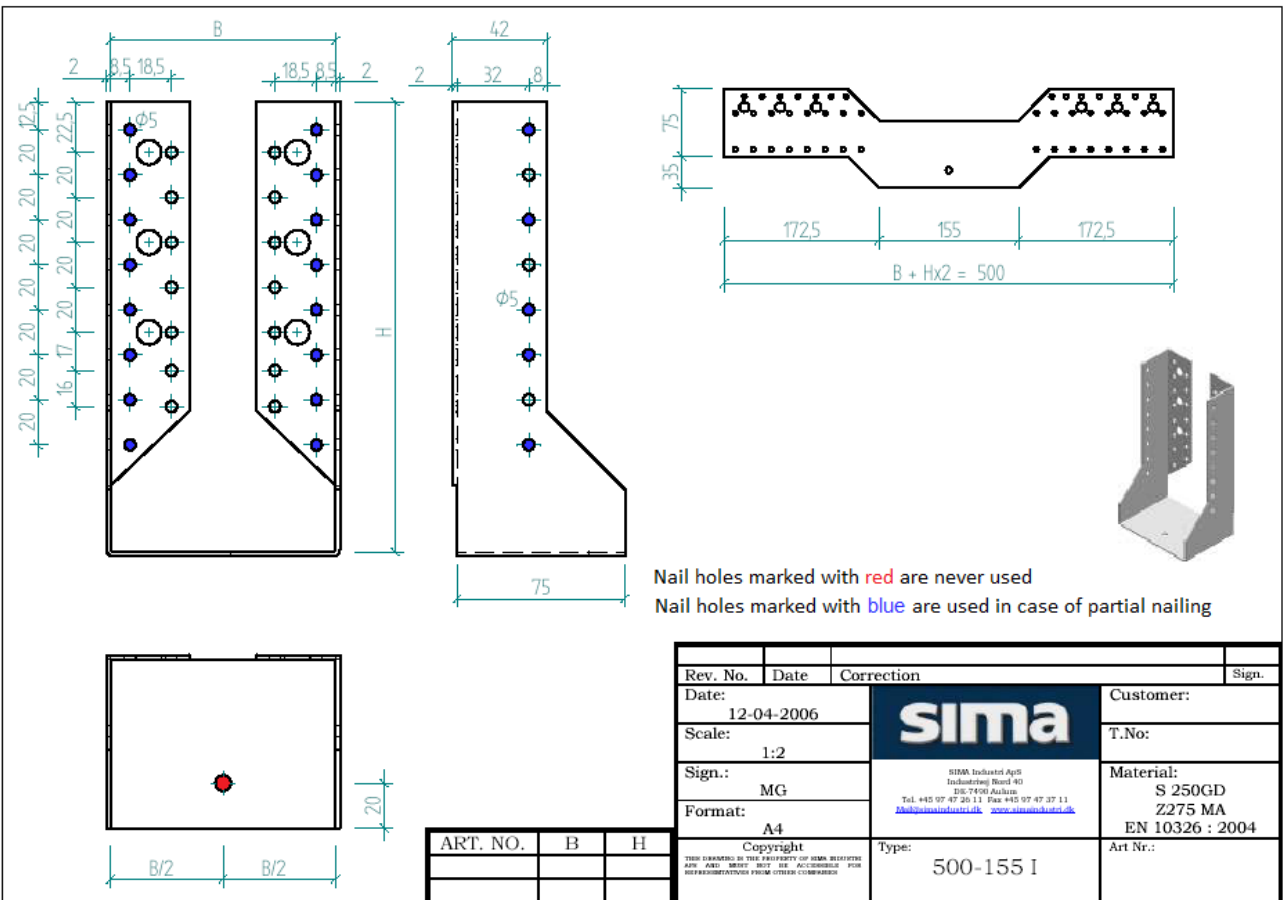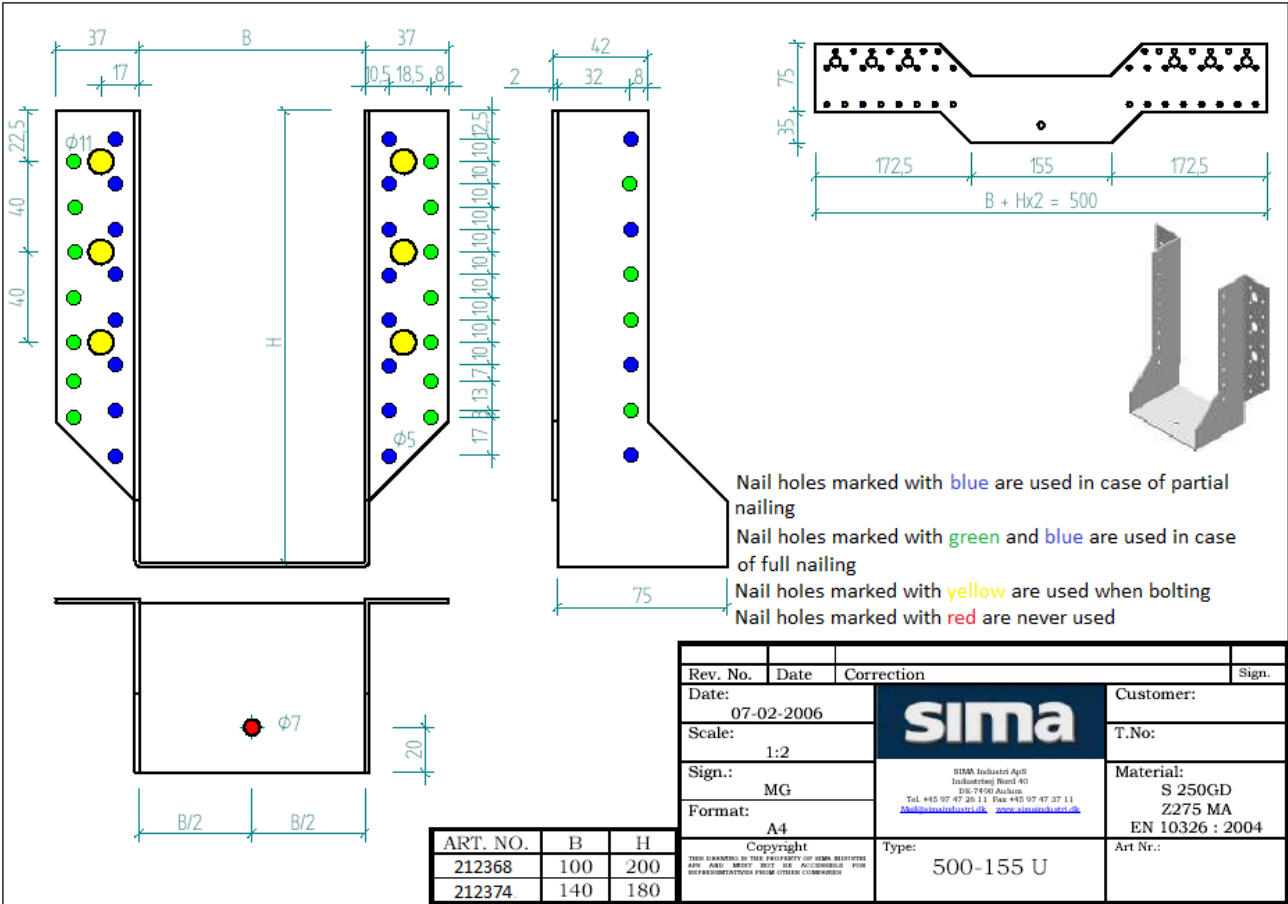

550-155 U/I

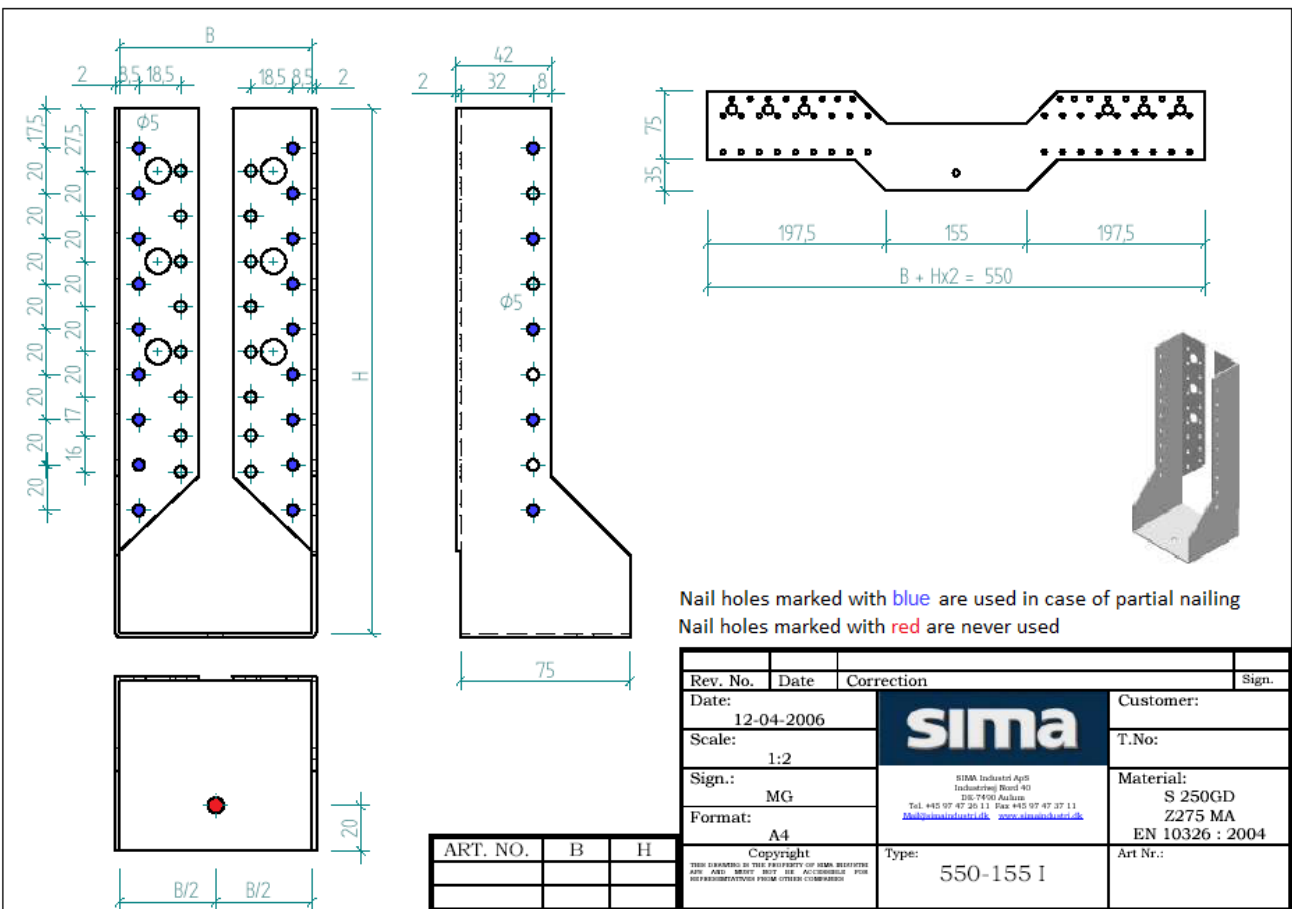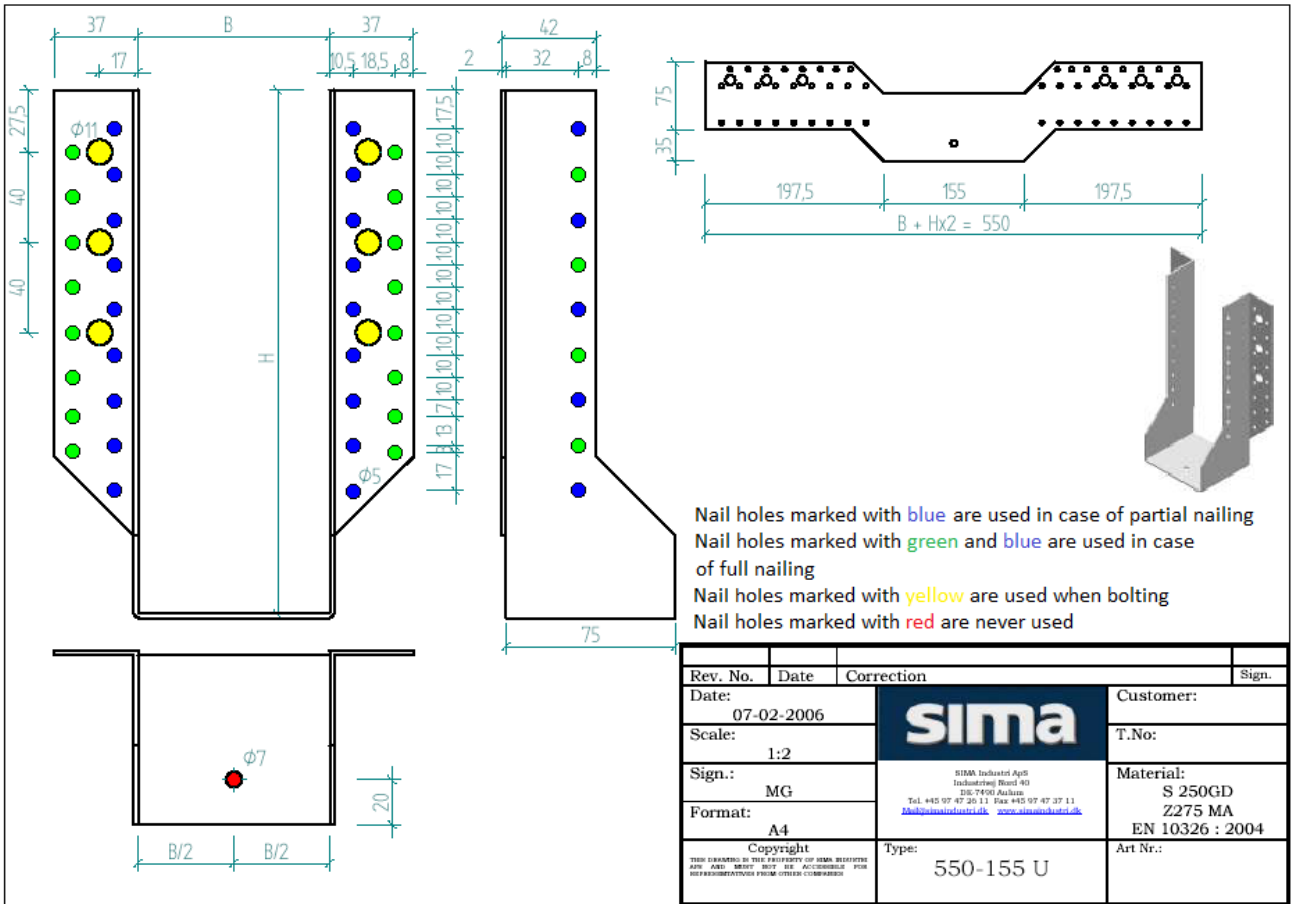

Characteristic capacities of the joist hanger connections with nails.

The downward and the upward directed forces are assumed to act in the middle of the joist.

Two nails patterns are specified. A full nailing pattern, where there are nails in all the holes. A partial nailing pattern, where the number of nails in the joist and the header are at least half the numbers specified for full nailing. The nails in the joist may be staggered and there shall always be a nail in the upper and the lower holes. The other nails are distributed evenly over the height. The nails in the header shall be put in the holes closest to the bend line.

The width of the joist shall be at least the penetration length of the nails, for full nailing and partial nailing without staggering the nails in the joist. For partial nailing with staggered nails in the joist the width shall be at least the penetration length of the nails.

A.1 Joist hangers with outward and inward flaps and fastened with nails

Force downward toward the bottom plate:

$$R_{Down,k} = \min \{ n_{J,ef,1} \cdot R_{lat,J,k}; n_H \cdot R_{lat,H,k} \}$$

Force upward away from the bottom plate:

$$R_{Up,k} = \min \{ n_{J,ef,2} \cdot R_{lat,J,k}; n_H \cdot R_{lat,H,k} \}$$

where the following symbols are:

$n_{J,ef,1}$ effective number of nails in the side of the joist

$n_{J,ef,2}$ effective number of nails in the side of the joist

n_H total number of nails in the side of the header

$R_{lat,k}$ characteristic lateral load-carrying capacity of the nails in the joist or in the header indicated by the indices J or H

$R_{ax,k}$ characteristic axial load-carrying capacity of the nails in the joist or in the header indicated by the indices J or H

A.2 Characteristic capacities of the joist hanger connections with bolts

For joist hangers connected to a wall of concrete, lightweight concrete or to a steel member the assumptions for the calculation of the load-carrying capacity of the connection are:

- The Transfer of force from the joist to the joist hanger is as for a wood-wood connection, se clause A.1.
- The bolts shall always be positioned symmetrically about the vertical axis of the joist hanger.
- Washers, 30x30x3 mm shall be installed under the upper 2 bolt heads or nuts

Description of the static model

For a downward directed force toward the bottom plate the static behavior is basically the same as for a wood-wood connection with nails or screws.

The nails in the joist are subjected to a lateral force, which is equally distributed over all nails or screws in the joist.

Since the concrete and steel have a larger compressive strength than timber subjected perpendicular to the grain the rotation point can be assumed positioned at the top of the bottom plate.

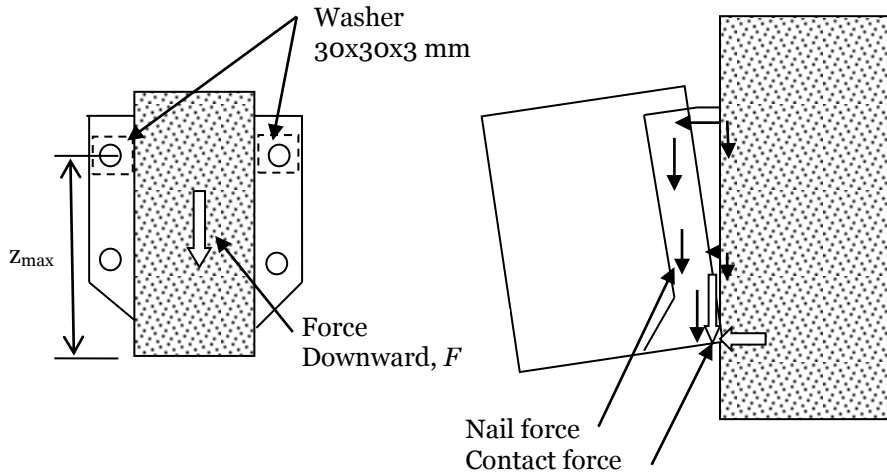


Figure B2 Left: Cross section in joist. Right: The joist will deflect and rotate, at the bottom a contact force will occur at the bottom plate, and the withdrawal forces in the bolts in the wall will vary linearly as assumed for nailed connections in the header.

The forces in the bolts will be partly lateral forces, partly withdrawal forces. The lateral forces are distributed evenly over all bolts. The withdrawal forces are on the safe side assumed to be taken by the 2 upper bolts with washers. The maximum withdrawal force in a upper bolt can be calculated from

$$F_{ax,bolt} = \frac{F \cdot e}{2 \cdot z_{max}} \quad (A.2.1)$$

where

F downward directed force toward the bottom plate

e eccentricity = distance from the nail column in the joist to the surface of the header.

z_{max} max distance from upper bolt to the bottom plate (rotation point)

The upper 2 bolts are critical. They are subjected to a lateral force and a withdrawal force. The lateral force is determined assuming an even distribution of the downward force F .

$$F_{lat,bolt} = F / n_{bolt} \quad (A.2.2)$$

Characteristic capacities of a bolted joist hanger connection

The characteristic capacity of the nail connection between the joist and the joist hanger can be calculated from the same assumptions and formulas as for joist hangers nailed or screwed to a wooden header.

$$R_{nail,k} = (n_J + 2) \cdot R_{lat,J,k} \quad (A.2.3)$$

The upper 2 bolts are critical. They are subjected to a lateral force calculated from formula (A.2.2).

The withdrawal force in an upper bolt is calculated from (A.2.1).

where

F downward directed force toward the bottom plate

n_{bolt} total number of bolts in the joist hanger

e eccentricity = distance from the nail column in the joist to the surface of the header

Z_{max} max distance from the upper bolt to the bottom plate (rotation point)

It shall be verified by the design of the bolted connection that the upper bolts have sufficient load-carrying design capacity to carry the combined lateral and axial forces.

From the characteristic capacity of the bearing resistance between the bolt and the plate of the joist hanger the following maximum characteristic capacity of the joist hanger connection can be determined.

$$R_{\text{bear},k} = n_{\text{bolt}} f_{u,k} dt \quad (\text{A.2.4})$$

where

n_{bolt} total number of bolts in the 2 flaps

$f_{u,k}$ characteristic ultimate tensile strength of the steel, 330 MPa

d diameter of the bolt

t thickness of the steel plate of the joist hanger

The characteristic load-carrying capacity of the joist hanger connections is the minimum of:

- The capacity determined from (A.2.3) from the nails in the joist
- The capacity determined from (A.2.4) from the embedding strength of the steel plate against the bolt
- The capacity controlled by the bolt forces given by (A.2.1) and (A.2.2).

Annex C.1

Characteristic capacities of the downward force F_{down}

For inwards beam shoes widths that are smaller than 80mm only the blue nail holes can be used. The load carrying values have only been assessed in accordance with EC 5 Table 3.1- "Values of K_{mod} "

Beam shoe 220-65 U PL

Paslode Connector nails 4,0 x 40 pr connection or Spit Tapcon 8x70/5 , F_{down} , [kN]				
Load Duration	8 nails Holes: Blue	14 nails Holes: Green + Blue	2 nails + 2 bolts Holes: Blue + Yellow	4 nails + 2 bolts Holes: Green + Blue + Yellow
P	5,11	7,58	5,29	7,93
L	5,96	8,84	6,17	9,25
M	6,81	10,10	7,05	10,57
S	7,66	11,37	7,93	11,89
I	9,36	13,89	9,69	14,53
Characteristic values found by calculation	8,51	12,63	8,81	13,21

Beam shoe 290-65 U PL

Paslode Connector nails 4,0 x 40 pr connection or Spit Tapcon 8x70/5 , F_{down} , [kN]				
Load Duration	12 nails Holes: Blue	23 nails Holes: Green + Blue	4 nails + 2 bolts Holes: Blue + Yellow	7 nails + 4 bolts Holes: Green + Blue + Yellow
P	7,93	11,89	7,93	11,89
L	9,25	13,87	9,25	13,87
M	10,57	15,86	10,57	15,86
S	11,89	17,84	11,89	17,84
I	14,53	21,80	14,53	21,80
Characteristic values found by calculation	13,21	19,82	13,21	19,82

Beam shoe 380-65 U PL

Paslode Connector nails 4,0 x 40 pr connection or Spit Tapcon 8x70/5, F _{down} , [kN]				
Load Duration	20 nails Holes: Blue	37 nails Holes: Green + Blue	6 nails + 2 bolts Holes: Blue + Yellow	11 nails + 6 bolts Holes: Green + Blue + Yellow
P	10,57	17,17	10,57	17,17
L	12,33	20,03	12,33	20,03
M	14,09	22,90	14,09	22,90
S	15,85	25,76	15,85	25,76
I	19,37	31,48	19,37	31,48
Characteristic values found by calculation	17,61	28,62	17,61	28,62

Beam shoe 230-65 U/I and 240-65 U/I

Paslode Connector nails 4,0 x 40 pr connection or bolts, F _{down} , [kN]				
Load Duration	10 nails Holes: Blue	18 nails Holes: Green + Blue	4 nails + 2 bolts Holes: Blue + Yellow	6 nails + 2 bolts Holes: Green + Blue + Yellow
P	6,79	6,79	9,85	10,27
L	7,92	7,92	11,49	11,98
M	9,05	9,05	13,13	13,69
S	10,18	10,18	14,77	15,40
I	12,44	12,44	18,05	18,82
Characteristic values found by calculation	11,31	11,31	16,41	17,11

Beam shoe 250-65 U/I

Paslode Connector nails 4,0 x 40 pr connection or bolts, F_{down} , [kN]				
Load Duration	12 nails Holes: Blue	22 nails Holes: Green + Blue	4 nails + 2 bolts Holes: Blue + Yellow	8 nails + 2 bolts Holes: Green + Blue + Yellow
P	9,05	9,05	9,85	13,20
L	10,56	10,56	11,49	15,40
M	12,06	12,06	13,13	17,60
S	13,57	13,57	14,77	19,80
I	16,59	16,59	18,05	24,20
Characteristic values found by calculation	15,08	15,08	16,41	22,00

Beam Shoe 260-65 U/I

Paslode Connector nails 4,0 x 40 pr connection or bolts, F_{down} , [kN]				
Load Duration	12 nails Holes: Blue	22 nails Holes: Green + Blue	4 nails + 2 bolts Holes: Blue + Yellow	8 nails + 2 bolts Holes: Green + Blue + Yellow
P	9,05	9,05	9,85	14,37
L	10,56	10,56	11,49	16,77
M	12,06	12,06	13,13	19,16
S	13,57	13,57	14,77	21,56
I	16,59	16,59	18,05	26,35
Characteristic values found by calculation	15,08	15,08	16,41	23,95

Beam Shoe 320-90 U/I

Paslode Connector nails 4,0 x 40 pr connection or bolts, F_{down} , [kN]				
Load Duration	16 nails Holes: Blue	28 nails Holes: Green + Blue	6 nails + 4 bolts Holes: Blue + Yellow	10 nails + 4 bolts Holes: Green + Blue + Yellow
P	11,31	11,31	9,94	11,74
L	13,20	13,20	11,59	13,69
M	15,08	15,08	13,25	15,65
S	16,97	16,97	14,90	17,60
I	20,74	20,74	18,22	21,52
Characteristic values found by calculation	18,85	18,85	16,56	19,56

Beam Shoe 380-90 U/I

Paslode Connector nails 4,0 x 40 pr connection or bolts, F_{down} , [kN]				
Load Duration	20 nails Holes: Blue	36 nails Holes: Green + Blue	8 nails + 4 bolts Holes: Blue + Yellow	12 nails + 4 bolts Holes: Green + Blue + Yellow
P	12,11	13,57	12,11	18,89
L	14,13	15,83	14,13	22,04
M	16,14	18,10	16,14	25,19
S	18,16	20,36	18,16	28,34
I	22,20	24,88	22,20	34,64
Characteristic values found by calculation	20,18	22,62	20,18	31,49

Beam Shoe 380-120 U/I

Paslode Connector nails 4,0 x 40 pr connection or bolts, F_{down} , [kN]				
Load Duration	20 nails Holes: Blue	36 nails Holes: Green + Blue	8 nails + 4 bolts Holes: Blue + Yellow	12 nails + 4 bolts Holes: Green + Blue + Yellow
P	12,11	13,57	16,63	18,89
L	14,13	15,83	19,40	22,04
M	16,14	18,10	22,18	25,19
S	18,16	20,36	24,95	28,34
I	22,20	24,88	30,49	34,64
Characteristic values found by calculation	20,18	22,62	27,72	31,49

Beam Shoe 440-130 U/I

Paslode Connector nails 4,0 x 40 pr connection or bolts, F_{down} , [kN]				
Load Duration	22 nails Holes: Blue	40 nails Holes: Green + Blue	8 nails + 6 bolts Holes: Blue + Yellow	14 nails + 6 bolts Holes: Green + Blue + Yellow
P	14,37	15,83	14,37	21,16
L	16,77	18,47	16,77	24,68e
M	19,16	21,11	19,16	28,21
S	21,56	23,75	21,56	31,73
I	26,35	29,03	26,35	38,79
Characteristic values found by calculation	23,95	26,39	23,95	35,26

Beam Shoe 500-155 U/I

Paslode Connector nails 4,0 x 40 pr connection or bolts, F_{down} , [kN]				
Load Duration	26 nails Holes: Blue	46 nails Holes: Green + Blue	10 nails + 6 bolts Holes: Blue + Yellow	16 nails + 6 bolts Holes: Green + Blue + Yellow
P	14,37	18,10	14,38	23,42
L	16,77	21,11	16,77	27,32
M	19,16	24,13	19,17	31,22
S	21,56	27,14	21,56	35,13
I	26,35	33,18	26,36	42,93
Characteristic values found by calculation	23,95	30,16	23,96	39,03

Beam Shoe 550-155 U/I

Paslode Connector nails 4,0 x 40 pr connection or bolts, F_{down} , [kN]				
Load Duration	28 nails Holes: Blue	52 nails Holes: Green + Blue	10 nails + 6 bolts Holes: Blue + Yellow	18 nails + 6 bolts Holes: Green + Blue + Yellow
P	16,63	20,36	16,63	25,68
L	19,40	23,75	19,40	29,96
M	22,18	27,14	22,18	34,24
S	24,95	30,54	24,95	38,52
I	30,49	37,32	30,49	47,08
Characteristic values found by calculation	27,72	33,93	27,72	42,80

Annex C.2

Characteristic capacities of the upward force F_{up} for beam shoes with outward (U) or inwards (I) flaps

For beam shoes widths (B) smaller than 80mm only partial nailing can be used. The load carrying values have only been assessed in accordance with EC 5 Table 3.1- "Values of K_{mod} "

Beam shoe 220-65 U PL

Paslode Connector nails 4,0 x 40 pr connection or bolts, F_{up} , [kN]				
Load Duration	8 nails Holes: Blue	14 nails Holes: Green + Blue	2 nails + 2 bolts Holes: Blue + Yellow	4 nails + 2 bolts Holes: Green + Blue + Yellow
P	2,64	5,20	2,64	5,29
L	3,08	6,07	3,08	6,17
M	3,52	6,94	3,52	7,05
S	3,96	7,80	3,96	7,93
I	4,84	9,54	4,84	9,69
Characteristic values found by calculation	4,40	8,67	4,40	8,81

Beam shoe 290-65 U PL

Paslode Connector nails 4,0 x 40 pr connection or bolts, F_{up} , [kN]				
Load Duration	12 nails Holes: Blue	23 nails Holes: Green + Blue	4 nails + 2 bolts Holes: Blue + Yellow	7 nails + 4 bolts Holes: Green + Blue + Yellow
P	5,29	6,15	5,29	6,15
L	6,17	7,18	6,17	7,18
M	7,05	8,20	7,05	8,20
S	7,93	9,23	7,93	9,23
I	9,69	11,28	9,69	11,28
Characteristic values found by calculation	8,81	10,25	8,81	10,25

Beam shoe 380-65 U PL

Paslode Connector nails 4,0 x 40 pr connection or bolts, F_{up} , [kN]				
Load Duration	19 nails Holes: Blue	37 nails Holes: Green + Blue	6 nails + 2 bolts Holes: Blue + Yellow	11 nails + 6 bolts Holes: Green + Blue + Yellow
P	7,93	10,76	7,93	10,76
L	9,25	12,56	9,25	12,56
M	10,57	14,35	10,57	14,35
S	11,89	16,15	11,89	16,15
I	14,53	19,73	14,53	19,73
Characteristic values found by calculation	13,21	17,94	13,21	17,94

Beam shoe 230-65 or 240-65 U/I

Paslode Connector nails 4,0 x 40 pr connection or bolts, F_{up} , [kN]				
Load Duration	10 nails Holes: Blue	18 nails Holes: Green + Blue	4 nails + 2 bolts Holes: Blue + Yellow	6 nails + 2 bolts Holes: Green + Blue + Yellow
P	1,38	2,77	1,38	2,77
L	1,61	3,23	1,61	3,23
M	1,84	3,69	1,84	3,69
S	2,07	4,15	2,07	4,15
I	2,53	5,07	2,53	5,07
Characteristic values found by calculation	2,30	4,61	2,30	4,61

Beam shoe 250-65 U/I

Paslode Connector nails 4,0 x 40 pr connection or bolts, F_{up} , [kN]				
Load Duration	12 nails Holes: Blue	22 nails Holes: Green + Blue	4 nails + 2 bolts Holes: Blue + Yellow	8 nails + 2 bolts Holes: Green + Blue + Yellow
P	2,77	4,15	2,77	4,15
L	3,23	4,84	3,23	4,84
M	3,69	5,53	3,69	5,53
S	4,15	6,22	4,15	6,22
I	5,07	7,60	5,07	7,60
Characteristic values found by calculation	4,61	6,91	4,61	6,91

Beam Shoe 260-65 U/I

Paslode Connector nails 4,0 x 40 pr connection or bolts, F_{up} , [kN]				
Load Duration	12 nails Holes: Blue	22 nails Holes: Green + Blue	4 nails + 2 bolts Holes: Blue + Yellow	8 nails + 2 bolts Holes: Green + Blue + Yellow
P	2,77	4,15	2,77	4,15
L	3,23	4,84	3,23	4,84
M	3,69	5,53	3,69	5,53
S	4,15	6,22	4,15	6,22
I	5,07	7,60	5,07	7,60
Characteristic values found by calculation	4,61	6,91	4,61	6,91

Beam Shoe 320-90 U/I

Paslode Connector nails 4,0 x 40 pr connection or bolts, F_{up} , [kN]				
Load Duration	16 nails Holes: Blue	28 nails Holes: Green + Blue	6 nails + 4 bolts Holes: Blue + Yellow	10 nails + 4 bolts Holes: Green + Blue + Yellow
P	2,77	5,52	2,77	5,52
L	3,23	6,44	3,23	6,44
M	3,69	7,36	3,69	7,36
S	4,15	8,28	4,15	8,28
I	5,07	10,12	5,07	10,12
Characteristic values found by calculation	4,61	9,20	4,61	9,20

Beam Shoe 380-90 U/I

Paslode Connector nails 4,0 x 40 pr connection or bolts, F_{up} , [kN]				
Load Duration	20 nails Holes: Blue	36 nails Holes: Green + Blue	8 nails + 4 bolts Holes: Blue + Yellow	12 nails + 4 bolts Holes: Green + Blue + Yellow
P	4,15	6,91	4,15	6,91
L	4,84	8,06	4,84	8,06
M	5,53	9,22	5,53	9,22
S	6,22	10,37	6,22	10,37
I	7,60	12,67	7,60	12,67
Characteristic values found by calculation	6,91	11,52	6,91	11,52

Beam Shoe 380-120 U/I

Paslode Connector nails 4,0 x 40 pr connection or bolts, F_{up} , [kN]				
Load Duration	20 nails Holes: Blue	36 nails Holes: Green + Blue	8 nails + 4 bolts Holes: Blue + Yellow	12 nails + 4 bolts Holes: Green + Blue + Yellow
P	4,15	6,91	4,15	6,91
L	4,84	8,06	4,84	8,06
M	5,53	9,22	5,53	9,22
S	6,22	10,37	6,22	10,37
I	7,60	12,67	7,60	12,67
Characteristic values found by calculation	6,91	11,52	6,91	11,52

Beam Shoe 440-130 U/I

Paslode Connector nails 4,0 x 40 pr connection or bolts, F_{up} , [kN]				
Load Duration	22 nails Holes: Blue	40 nails Holes: Green + Blue	8 nails + 6 bolts Holes: Blue + Yellow	14 nails + 6 bolts Holes: Green + Blue + Yellow
P	4,15	8,29	4,15	8,29
L	4,84	9,67	4,84	9,67
M	5,53	11,06	5,53	11,06
S	6,22	12,44	6,22	12,44
I	7,60	15,20	7,60	15,20
Characteristic values found by calculation	6,91	13,82	6,91	13,82

Beam Shoe 500-155 U/I

Paslode Connector nails 4,0 x 40 pr connection or bolts, F_{up} , [kN]				
Load Duration	26 nails Holes: Blue	46 nails Holes: Green + Blue	10 nails + 6 bolts Holes: Blue + Yellow	16 nails + 6 bolts Holes: Green + Blue + Yellow
P	5,52	9,67	5,52	9,67
L	6,44	11,28	6,44	11,28
M	7,36	12,90	7,36	12,90
S	8,28	14,51	8,28	14,51
I	10,12	17,73	10,12	17,73
Characteristic values found by calculation	9,20	16,12	9,20	16,12

Beam Shoe 550-155 U/I

Paslode Connector nails 4,0 x 40 pr connection or bolts, F_{up} , [kN]				
Load Duration	28 nails Holes: Blue	52 nails Holes: Green + Blue	10 nails + 6 bolts Holes: Blue + Yellow	18 nails + 6 bolts Holes: Green + Blue + Yellow
P	6,91	12,43	6,91	12,43
L	8,06	14,50	8,06	14,50
M	9,22	16,58	9,22	16,58
S	10,37	18,65	10,37	18,65
I	12,67	22,79	12,67	22,79
Characteristic values found by calculation	11,52	20,72	11,52	20,72